



CONNECTING BLOCKS

110 WIRING BLOCKS CBB04 CBB05



Photo



CBB04



CBB05

Products Description


These high-quality Connecting Blocks securely seat the wire on 110 wiring bases, providing a gas-tight IDC connector that maintains signal integrity for high performance applications. The Connecting Blocks terminate 22-26AWG (0.64-0.20 mm) insulated conductors without prior removal of the insulation. The top of the Connecting Block is stamped with the product code, while the color code on the high teeth is provided to allow for pair identification during installation.

Features and benefits


- White or ivory color
- Meet or exceed the requirements in the Cat 6 T568 A and T568 B
- Contacts are nickel plated, phosphor bronze with 6 to 50u" gold plate
- Exclusive stagger conductors guide design reduces near end cross talk
- For standard UTP cable

Presentation

CBB04 Presentation

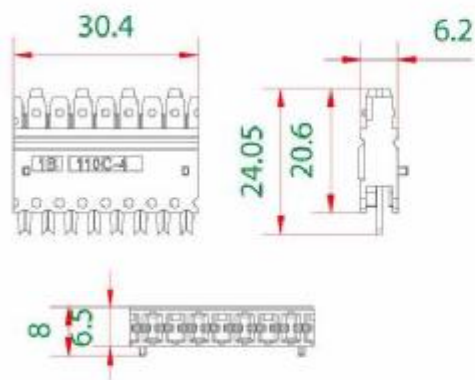

CBB05 Presentation

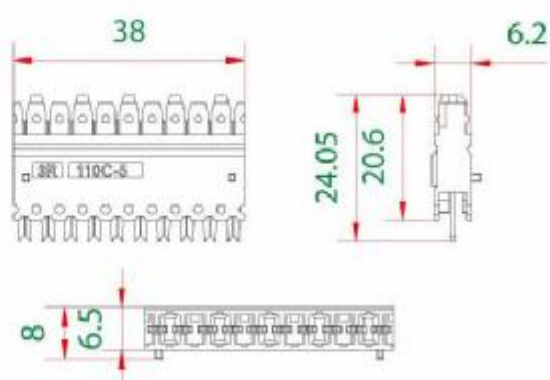

Order Information

Part number	Description	Inner box	Carton	Carton measurement	Carton weight
CBB04	4 pairs 110 connecting block	200PCS	2000PCS	L 53.5cm × W 31.3cm × H 23.4cm	11KG
CBB05	5 pairs 110 connecting block	200PCS	2000PCS	L 53.5cm × W 31.3cm × H 23.4cm	11.5KG