


10W Radio Module for Data

Transmission KYL-300P

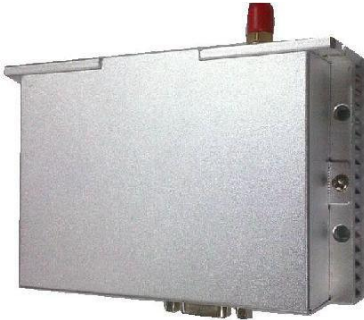

Features:

- ◆ RF output Power can be programmed from 10 watts down to 2 watts with 10 levels .
- ◆ Two interface usable at same time.RS232 & RS485
- ◆ Frequency can be reprogrammed in specific band.
- ◆ Pin 1/4/6/9 expandable
- ◆ High power, long transmission distance
- ◆ Transparent data transmission for all kinds of Micro-controller,PC,RS485 equipment and other devices.

I. Technical specification

PERFORMANCE	
Power Output:	10W(Default)
RF Effective Rate:	1200/2400/4800/9600/19200bps
Space Channel:	1MHz(Default), 12.5/25KHz selectable
Bandwidth:	<25KHz
Receiver Sensitivity:	-123dBm@1200bps (1% BER)
NETWORKING	
Networking Topology:	Point-to-point, point-to-multipoint
COMPATIBILITY	
KYL-300 and KYL-200 series	
POWER	
Supply Voltage:	12-30V DC
GENERAL	
Communication Mode:	Half-duplex
Frequency Band:	433MHz (400/450/470MHz optional)
Channel:	16
Interface:	RS485 & RS232
PHYSICAL PROPERTIES	
Antenna Base:	50Ω, SMA
Operating Temperature:	Industrial: -40℃~+80℃(TCXO)

AI. Application Field

- * Automatic Meter Reading (AMR);
- * Wireless alarm and security systems;
- * Building automation, security systems, wireless monitor;
- * Wireless data transmission, automatic data collection system;
- * Wireless POS, PDA wireless smart terminal;
- * RF transmitter, Wireless electronic display screen and Queuing machine;
- * Wireless telemetry; remote control and access control system;

- * Wireless modem automobile inspection and four-wheel orientation;
- * Wireless sensor, Industrial wireless remote control;
- * Data communication in the aspects of railway, oil field, dock and army.
- * LED display in thruway and public place;
- * Point to multi-point wireless network.

.....


III.Connection

1. Default 12V Power supply

2. PIN Definition (9pin)

Pin No.	Signal Name	Function	Connection with terminal	Remarks
1	NC			
2	RS-232 TX	Data transmitting		
3	RS-232 RX	Data receiving		
4	NC			
5	GND	Grounding of power supply	Ground	
6	NC			
7	RS-485 B	RS 485-		
8	RS-485 A	RS 485+		
9	NC			

3. The connection schematic between computer and the RF module

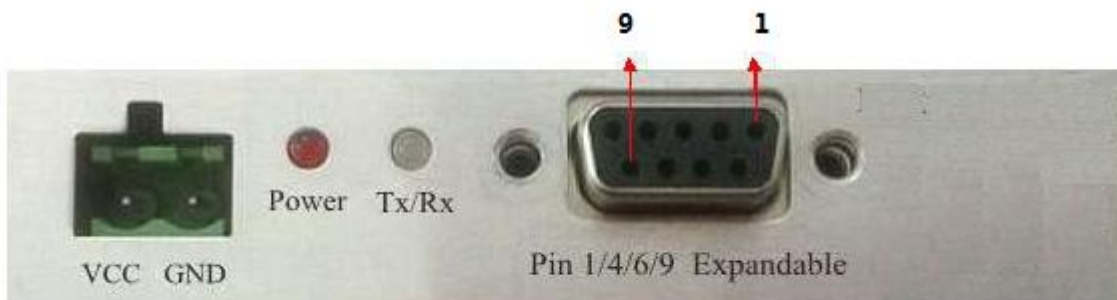

4. The Function-indicator light

When the LED of Power turn red,which means the module is power up.

When the module is transmitting signal,the LED of “Tx/Rx” will flash red light.

When the module is receiving signal,the LED of “Tx/Rx” will flash green light.