

KYL-600L Wireless Data/Audio Module



KYL-600L Data/Audio module, with advanced arithmetic fault-rectify system in software design, adopting double VCO structure and high stability TXCO, it has good stability and reliability. This module is usually used for industry control, water conservancy, electric, oil field management and so on. It can be customized to VHF or UHF frequency band to transmit data or voice. Moreover, we can extend its functions and ODM products for you according to your specific application.

1. Specifications:

- * Operating Voltage: DC 12V/5V
- * Carrier Frequency: VHF/UHF (for example 144MHz, 230MHz, 400MHz and other)
- * Interface: standard RS-232/RS-485/TTL Selectable
- * Baud Rate: 1200/2400 Selectable
- * Channel spacing: 25kHz/12.5KHz/5KHz
- * Frequency stability: $\pm 2.5\text{ppm}$
- * Modulation: MSK;
- * Impedance: 50Ω
- * Transfer distance: 3km(BER= 10^{-3} @9600bps);
- * Temperature: $-30^{\circ}\text{C}\sim+70^{\circ}\text{C}$
- * Size: 70x46x12mm(without antenna port)
- * Weight: 180g

2. Receiver:

- * Receiving sensibility: $\leq 0.25\mu\text{V}$ (12dB SINAD)
- * Signal-to-Noise: $\leq -40\text{dB}$
- * Adjacent channel selectivity: $\geq 70\text{dB}$
- * Inter-modulation rejection: $\geq 65\text{dB}$
- * Clutter and images rejection: $\geq 70\text{dB}$
- * Receiving current: 50mA
- * Audio Output power: 0.5W (8Ω , 10% distortion)
- * Receiving distortion: $\leq 3\%$

3. Transmitter:

- * RF power: 1W/500mW
- * Transmitting current: 300mA
- * Modulation: FFSK
- * Audio distortion: $\leq 3\%$
- * Frequency deviation: $\pm 5.0\text{kHz}$
- * Adjacent channel power: $\geq 70\text{dB}$
- * Transmitter start up time: $\leq 50\text{m}$
- * Surplus Frequency Modulation: $\leq -40\text{dB}$
- * Modulation distortion: $\leq 3\%$
- * Modulation sensibility: 5mV
- * Transmission distance: 3Km
- * Volts D.C.: 12V/5V DC

4. Features of KYL-600L:

- 1) Design for the special use of wireless voice transmission in industrial automation
- 2) High stability, good reliability and low power consumption
- 3) Standard UART port available : RS-232/RS-485/TTL
- 4) Easy to install, flexible networking configuration, also suitable for multiple-point to point communication in decentralization and complex geography environment.
- 5) Metal shell, good shielding performance, flexible frequency band available.
- 6) Provide programming software or AT command for parameter configuration.
- 7) If needed, we may do some development based on existing product.

5. Size

Product dimension: 70x46x12mm. Antenna connection: TNC (SMA) -50 Ω


Interface definition:

Pin No.	Signal name	Function	Level	Remarks
1	VCC	Power input	12 V	1W and 500mW modules are 12V power supply
2			5V	For 500mW module, 5V is also available
3	GND	Ground of the power		
4				
5	A (TXD)	RS-485 A or TXD of RS-232		choose RS232, RS485 or TTL, only one valid
6	B (RXD)	RS-485 B or RXD of RS-232		
7	PTT	Transmitting control	TTL	Low level valid
8	MIC	Audio input control		Microphone with 1k Ω -2k Ω and -27dB
9	SP	Output audio		8 Ω 0.5
10	SQ	receiving	TTL	High level if there is carrier frequency

6. Applications:

- * Industrial automatic control and remote control
- * Wireless data acquisition and SCADA
- * Environment monitoring systems
- * AMR Automatic Meter Reading
- * Wireless data transmission, automatic data collection system;
- * Low power telemetry
- * Wireless conference voting system;
- * Sports training & competition;
- * Wireless POS, PDA wireless smart terminal;
- * Electronic bus station and intelligent traffic;
- * RF transmitter Wireless electronic display screen
- * Wireless modem Automobile inspection and four-wheel orientation;
- * Data communication used for railway, oil field, dock and army.
- * LED display in thruway and public places
- * Point to multi-point wireless network, wireless on-the-spot bus and automatic data collection system;

7. The installing schematic

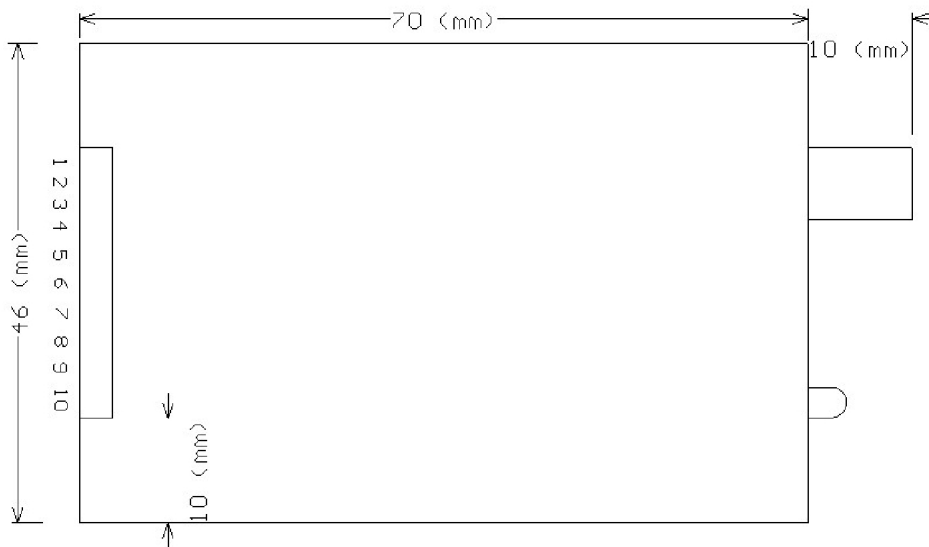

8. Notice

- 1) The antenna should be away from the power supply if using switch power, because the transmitting of the antenna may affect switch power. When wrong transmission happen, please check whether the antenna interferes power voltage.
- 2) Use min.grain wave and high anti-jam switch power or batteries to supply power

- 3) The power capacity must meet D.C. 5 or 12V, more than 800mA output current.
- 4) The space between the experiments Radio should be more than 5m. The antenna should amount high to increase electric wave's idstance.
- 5) The antenna plywood should nip in the connection inside the antenna, not nip the antenna's projectile to maintain good result.

9. Standard configuration and Antenna configuration

i: Standard configuration:

- * One KYL-600L RF module
- * A 9pin flat Connection Line
- * A whip antenna (about 10cm)

ii: Antenna configuration:

Many appropriative antennas for our RF modules are selected to meet different user's antenna configuration. Please ask our Sales office for further information about the antenna's dimension and performance. The usual antenna we use for KYL-600L is A3 antenna.

