


Ceramic Fiber Board / Block / Slab (Non-asbestos)

Ceramic fiber board/ block/ slab is suitable for the material of wall lines and back lines, the sealing and insulating material of the expanded gap of furnace wall, furnace doors; The material to separate every temperature zone in furnace and the material to keep out the fire; Heat insulation for high-temperature equipment, etc., with properties of low thermal conductivity, excellent compressive strength and toughness, etc..

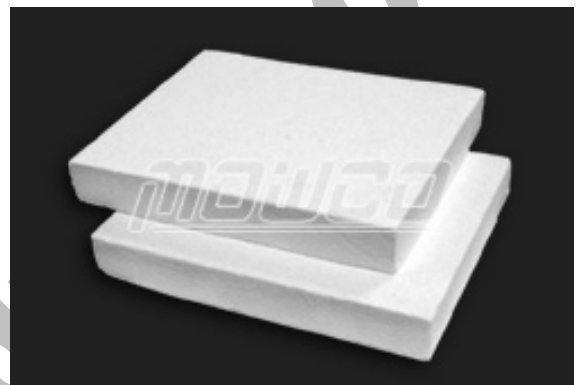

Classification Temp (°C)	1260	1400
Product	Ceramic fiber insulating board	Ceramic fiber refractory
Density (kg/m ³)	280±15	
Compressive Strength (Mpa)	≥ 0.5	
Shrinkage on heating (%)	1100 °C x 24hrs	1300 °C x 24hrs
	≤ -3	≤ -3
Standard Size	900 x 600 x 25mm; 900 x 600 x 50mm	

Correlative page:

<http://www.mowcoproducts.com/ceramic-fiber-boards.html>