

RS-545C DC MOTOR Series




Typical applications: SG-545(Φ37mm)、VF (69.9X76.2)、MF(70X70mm)、
 RG-50 (Φ50.8mm)、TT(60X95mm)、PG-36(Φ36mm)planetary、
 PG-45(Φ45mm) planetary box、GF(69.9X119.1mm)、
 QF(73.2X95.8mm)、ZF(63.5X90.2mm)、RF(63.5X90.2mm)、
 KF(63.5X68.3mm)、JR(55.6X104.2mm)、60X60mmgearedbox .


MOTOR TORQUE/SPEED/CURRENT

MOTOR MODEL	Rated Vol. V	No load		At maximum efficiency				Stall	
		Current	Speed	Current	Speed	Torque	Power	Torque	Current
		mA	r/min	mA	r/min	g·cm	W	g·cm	mA
RS-545-12-3000	12	≤ 110	3000	≤ 450	2200	100	2.2	400	2000
RS-545-12-4500	12	≤ 220	4500	≤ 900	3350	130	4.35	520	3400
RS-545-24-3000	24	≤ 60	3000	≤ 250	2200	100	2.2	400	1000
RS-545-24-4500	24	≤ 110	4500	≤ 500	3350	130	4.35	520	1500


APPEARANCE SIZE

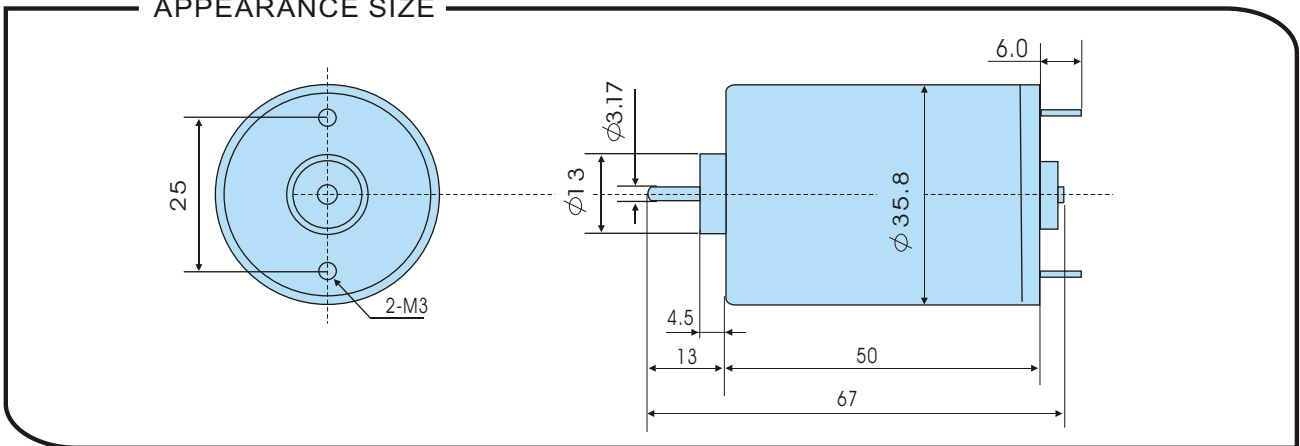


RS-545-12-3000 CHARACTERISTICS

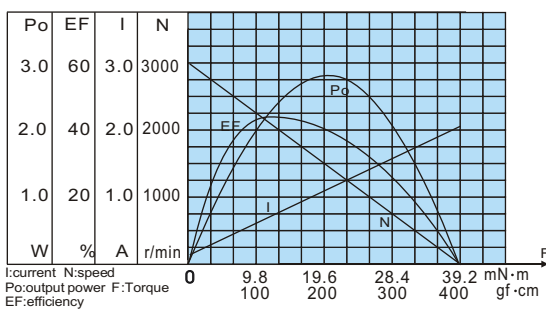

RS-545-24-3000 CHARACTERISTICS

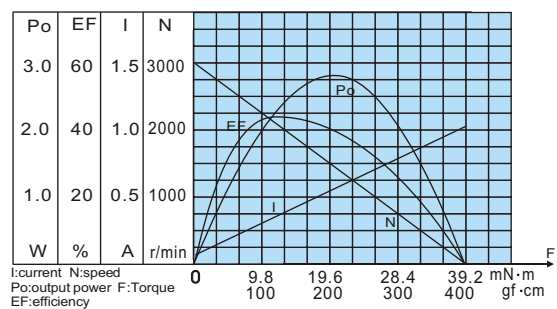

RS-545-12-4500 CHARACTERISTICS

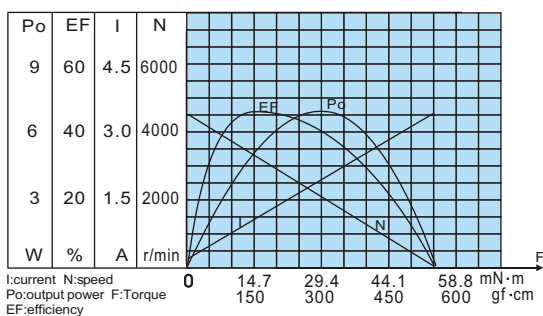

RS-545-24-4500 CHARACTERISTICS

