


AC9139 PVC WAFER CHECK VALVE

- ◎ Size: 6"-12"(DN150-DN300)
- ◎ Standard: DIN
- ◎ Material: UPVC,CPVC
- ◎ Working pressure:0.6 -1.0mpa/6-10bar/100-150psi

Caution:

- ◎ Arrow mark indicates the flow of fluid
- ◎ When in horizontal installation,make sure the stationary ring on the top side.
- ◎ Do not install the valve at a distance lower than 5xD of pump out
- ◎ DIN flange only

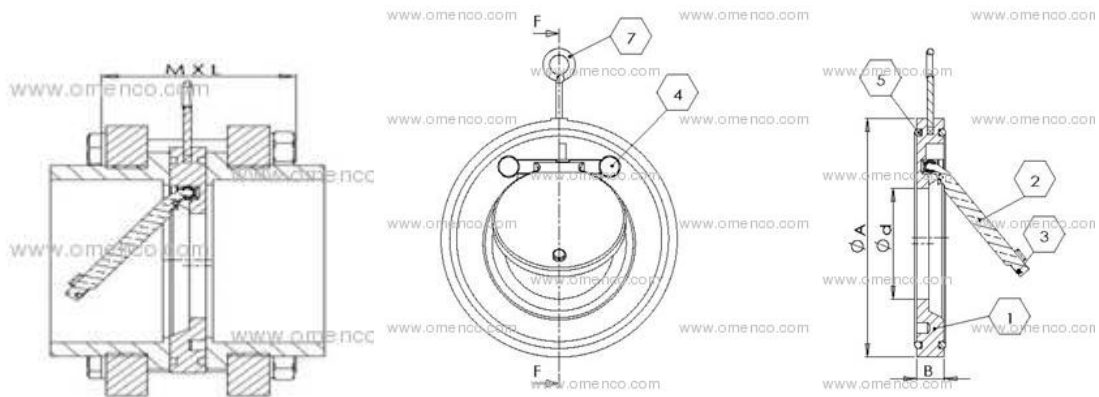

No.	Parts	Material	QTY
1	Body	UPVC/CPVC	1
2	Flap	UPVC/CPVC	1
3	O-ring	EPDM/FPM	1
4	Cap	UPVC/CPVC	2
5	O-ring	EPDM/FPM	2
6	Spring	STAINLESS STEEL 304	1

7	Stationary ring	Steel	1
---	-----------------	-------	---

Size	DN	D	PN(Mpa)	A	B	d	Flange	Bolt MxL
6"	150	160	1	218	26	105	DN150	20x130
8"	200	200	0.6	273	34	126	DN200	20x140
8"	200	225	0.6	273	34	140	DN200	20x140
10"	250	250	0.6	330	40	170	DN250	22x160
12"	300	315	0.6	380	47	220	DN300	22x180