
	<p>Xinji Huarui Filter Paper Co.,ltd Main product: air filter paper, auto filter paper, filter paper, filter papers, oil filter paper, fuel filter paper, air/oil filter paper, automotive filter paper, wood pulp filter paper,cotton pulp filter paper.</p>
<p>Company Overview& Product Advantages:</p>	<p>Founded in 2006, Xinji Huarui Filter Paper Co., Ltd. is located in Xinji-a rapidly developing city. Our company is a privately operated enterprise collecting the production, research and marketing. We provide high-quality service for customers. We are specialized in producing air filter paper, oil filter paper, fuel filter paper for automobiles, filter paper for air conditioners as well as each kind of chemical filter paper. Our products enjoy excellent quality and reasonable price and obtain approval of domestic and foreign professors stably. They call it "excellent filter paper material."</p> <p>Our company has passed the evaluation of ISO9001:2000 certification smoothly just because our quality policy is "takes the quality as basis, persists in service idea and realize customers' satisfaction".</p> <p>Welcome friends at home and abroad to contact us!</p>
<p>Business Type:</p>	<p>Manufacturer</p>
<p>Export Market:</p>	<p>North America/South America/Eastern Europe/Southeast Asia/Africa/Oceania/Mid East/Eastern Asia/Western Europe</p>
<p>Featured Product Images:</p>	
<p>Main Model</p>	<p>Air&Oil&Fuel&Auto</p>
<p>Remark</p>	<p>Minimum Order Quantity: 5 Metric Ton Supply Ability:5000 Metric Ton per Year Price: FOB Tianjin XINGANG USD Packaging Details:Packed in kraft paper with plastic film liner. Delivery Time:Within 10-15 days after receiving the correct Sales Contract. Payment Terms: L/C,T/T</p>



Specification Sheet

Item	Grammage (g/m ²)	Thickness (mm)	Corrugation Depth (mm)	Air Permeability ($\Delta p=200\text{pa}$ L/m ² .s)	Burst Strength (Kpa)	Max Pore Size (μm)	Stiffness (mN.m)	Color	Usage
HRJKW-Y02	125±5	0.45	0.2	234±30	260	80	5.9	Yellow	Air/Oil Filter Paper
HRRP-Y06	130±5	0.42	0.2	150±30	376	65	6.0	Yellow	Fuel Filter Paper
HRKP-W03	140±5	0.5	—	190±30	335	70	5.5	White	Heavy Air Filter Paper
HRJW-B02	160±5	0.5	0.2	330±30	340	81	13.5	Brown	Oil Filter Paper
HRRW-W05	120±5	0.45	0.2	70±20	344	50	5.5	White	Fuel Filter Paper
HRJKP-W05	120±5	0.35	—	340±30	308	95	4.0	White	Air/Oil Filter Paper
HRKP-Y06	125±5	0.4	—	415±30	290	100	3.5	Yellow	Air Filter Paper
HRJKW-R03	135±5	0.43	0.2	390±30	240	90	5.9	Red	Air/Oil Filter Paper
HRJKW-W03	125±5	0.45	0.2	234±30	260	80	5.9	White	Air Filter Paper
HRJW-G01	170±5	0.7	0.2	290±30	330	70	14	Green	Oil Filter Paper

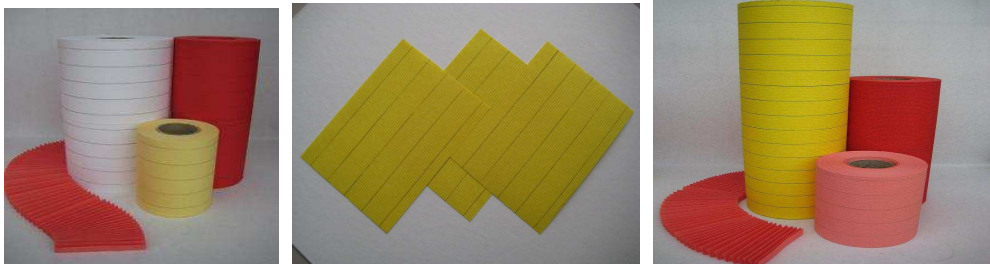

Specification Sheet

Item	Grammage (g/m ²)	Thickness (mm)	Corrugation Depth (mm)	Air Permeability ($\Delta p=200pa$ L/m ² .s)	Burst Strength (Kpa)	Max Pore Size (μm)	Stiffness (mN.m)	Color	Usage
HRKP-Y09	145±5	0.5	—	350±30	300	90	4.5	Yellow	Air Filter Paper
HRJKW-P02	145±5	0.43	0.2	420±30	260	95	8.4	Pink	Air/Oil Filter Paper
HRRP-BL01	110±5	0.4	—	150±30	323	55	4.7	Blue	Fuel Filter Paper
HRJKW-G02	115±5	0.35	0.2	445±30	280	99	3.5	Green	Air/Oil Filter Paper
HRJKW-Y06	115±5	0.35	0.2	445±30	200	99	3.5	Yellow	Air/Oil Filter Paper
HRJKP-Y07	105±5	0.4	—	445±30	200	99	4.0	Yellow	Air/Oil Filter Paper
Quality Standards	130±5	0.35	—	370±30	320±30	90	3.0	Yellow	Fuel Filter Paper
Quality Standards	110±5	0.3	—	635±30	280±30	105	3.0	Blue	Fuel Filter Paper
Quality Standards	110±5	0.4	—	720±30	255±30	110	5.0	Yellow	Oil Filter Paper
Quality Standards	145±5	0.4	—	350±30	385±30	100	3.5	Red	Air Filter Paper

Note: the color, size and each specification parameter can be changed as per your requirement.



Xinji Huarui Filter Paper Co.,Ltd. is a leading professional manufacturer in the field of automobile pure wood-pulp filter paper in China. Its products mainly include auto air filter paper,oil filter paper and fuel filter paper. Moreover,the wood pulp we are using is imported from U.S.A. and Sweden.

Air filter paper

Item	Value
BASIS WEIGHT(g/m ²)	100~145
THICKNESS(mm)	≥0.40
AIR PERMEABLITY(p=200paL/m ² .s)	≥400
CORRUGATED DEPTH(mm)	0.25
BURST STRENGTH(Kpa)	≥200
MAXIMUM PORE SIZE(um)	100
RESIN CONTENT(%)	23

Oil filter paper

Item	Value
BASIS WEIGHT(g/m ²)	100~145
THICKNESS(mm)	≥0.40
AIR PERMEABLITY(p=200paL/m ² .s)	≥400
CORRUGATED DEPTH(mm)	0.25
BURST STRENGTH(Kpa)	≥200
MAXIMUM PORE SIZE(um)	110
RESIN CONTENT(%)	23

Air & Oil filter paper

Item	Value
BASIS WEIGHT(g/m ²)	100~145
THICKNESS(mm)	≥0.40
AIR PERMEABLITY(p=200paL/m ² .s)	≥400
CORRUGATED DEPTH(mm)	0.25
BURST STRENGTH(Kpa)	≥200
MAXIMUM PORE SIZE(um)	110
RESIN CONTENT(%)	23

Fuel filter paper

Item	Value
BASIS WEIGHT(g/m ²)	130~150
THICKNESS(mm)	≥0.40
AIR PERMEABLITY(p=200paL/m ² .s)	≤150
CORRUGATED DEPTH(mm)	0.25
BURST STRENGTH(Kpa)	≥300
MAXIMUM PORE SIZE(um)	110
RESIN CONTENT(%)	23

Testing equipment



Workshop



Honor

