

NT (ISO) MILLING CHUCKS

NT(ISO)強力式立銑刀把

NT Shank DIN 2080

FEATURES:

- It is designed with inner rolling needles inside. This design can reduce the friction resistance when tightening and the wear of parts.
- The design of dustproof can prevent iron scrap dropping and extend longevity of chuck.
- The high clamping force is available. The product can prevent the cutting tools slipping when the users worked it and increase the longevity of cutting tools.
- High rigidity ■ High precision


APPLICATION:

- The Milling chuck can be applied for heavy-duty & higher accuracy cutting.

特性

- 內部滾針設計，可減少鎖緊時之摩擦阻力及零件磨耗。
- 防塵設計減少鐵屑掉入以延長使用壽命。
- 高夾持力，防止刀具於加工時滑脫，增加刀具壽命
- 剛性
- 高精密

- 此強力銑刀把適用重型及高精密切削

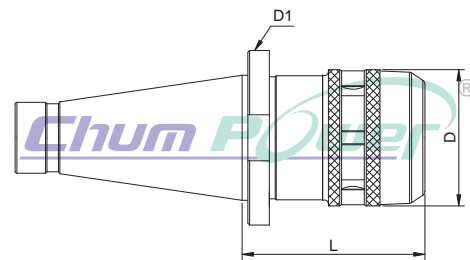

Code NO. 型號	TYPE 規格	L	D	D1	Thread Size 螺紋尺寸	Spanner No. 扳手編號
RR03010	R8xC20- 62.5	62.5	52	49	7/16"-NF20	80200-05
NT03004	NT30xC20- 70	70	52	49	1/2"W12	80200-05
NT03005	NT30xC20- 70	70	52	49	M12x1.75P	80200-05
NT03006	NT30xC20- 70	70	52	49	1/2"UNC13	80200-05
NT03013	NT30xC25- 80	80	58	49	1/2"W12	80200-10
NT03014	NT30xC25- 80	80	58	49	M12x1.75P	80200-10
NT03015	NT30xC25- 80	80	58	49	1/2"UNC13	80200-10
NT03025	NT30xC32- 85	85	70	49	1/2"W12	80200-15
NT03026	NT30xC32- 85	85	70	49	M12x1.75P	80200-15
NT03027	NT30xC32- 85	85	70	49	1/2"UNC13	80200-15
NT03037	NT40xC20- 70	70	52	63	5/8"W11	80200-05
NT03038	NT40xC20- 70	70	52	63	M16x2.0P	80200-05
NT03047	NT40xC25- 85	85	58	63	5/8"W11	80200-10
NT03048	NT40xC25- 85	85	58	63	M16x2.0P	80200-10
NT03057	NT40xC25- 130	130	58	63	5/8"W11	80200-10
NT03058	NT40xC25- 130	130	58	63	M16x2.0P	80200-10
NT03067	NT40xC32- 80	80	70	63	5/8"W11	80200-15
NT03068	NT40xC32- 80	80	70	63	M16x2.0P	80200-15
NT03077	NT40xC32- 95	95	70	63	5/8"W11	80200-15
NT03078	NT40xC32- 95	95	70	63	M16x2.0P	80200-15
NT03087	NT40xC32- 130	130	70	63	5/8"W11	80200-15
NT03088	NT40xC32- 130	130	70	63	M16x2.0P	80200-15
NT03097	NT50xC25- 85	85	58	97.5	1"W8	80200-10
NT03098	NT50xC25- 85	85	58	97.5	M24x3.0P	80200-10
NT03107	NT50xC25- 150	150	58	97.5	1"W8	80200-10
NT03108	NT50xC25- 150	150	58	97.5	M24x3.0P	80200-10
NT03127	NT50xC32- 100	100	100	97.5	1"W8	80200-15
NT03128	NT50xC32- 100	100	100	97.5	M24x3.0P	80200-15
NT03137	NT50xC32- 150	150	70	97.5	1"W8	80200-15
NT03138	NT50xC32- 150	150	70	97.5	M24x3.0P	80200-15
NT03147	NT50xC42- 90	90	87	97.5	1"W8	80200-20
NT03148	NT50xC42- 90	90	87	97.5	M24x3.0P	80200-20
NT03157	NT50xC42- 110	110	87	97.5	1"W8	80200-20
NT03158	NT50xC42- 110	110	87	97.5	M24x3.0P	80200-20
NT03167	NT50xC42- 150	150	87	97.5	1"W8	80200-20
NT03168	NT50xC42- 150	150	87	97.5	M24x3.0P	80200-20

*Custom-built products are available on request.

