

# GENERAL CONTROL RELAY

To learn more new products and services ,email us or visit our website today .

<http://www.vicon-relay.com>


## Type: VG115H



29.0 × 12.7 × 15.7 mm

## ① Ordering Information

VG115H-S-1 12 M-C

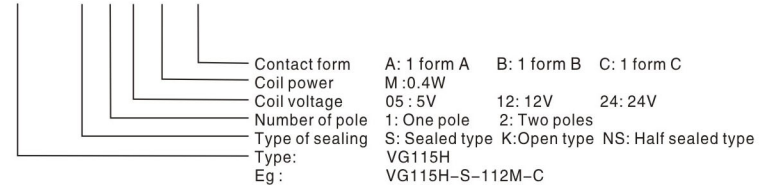

## ② Coil Ratings

Coil voltage(V)	3 5 6 9 12 24 48
Coil power	0.4W





## ③ Contact Data

Contact Form	1A 1C
Contact Material	AgSnO <sub>2</sub> ,AgCdO
Max. Allowable Contact Current(A)	16A
Max.Switching Voltage	440VAC/ 125VDC
Max.Switching Power	3000VA
Rated load	16A 250VAC 30VDC

## ④ Specifications

Insulation Resistance	1000mΩ
Dielectric Strength	
(Between coil and contacts)	5000VAC 1min
Ambient Temperature	-40°C to 85°C
Operate/release time max.	15ms / 8ms
Mechanical Endurance min	1 × 10 <sup>7</sup> ops
Electrical Endurance min	1 × 10 <sup>5</sup> ops

## ⑤ Outline Dimensions ,Wiring Diagram and PCB layout.

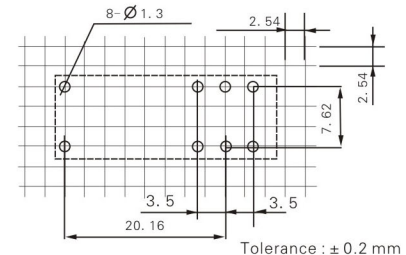

⑥ Packing information: 1000pcs/ctn G.W:14.5 kgs Carton dimensions (CM): 37.5 × 38 × 15