

# TELECOM RELAY

To learn more new products and services ,email us or visit our website today . <http://www.vicon-relay.com>


## Type: VS4100



15.7 × 11.0 × 12.0mm

## ① Ordering Information

VS4100-S-1 12 H-C

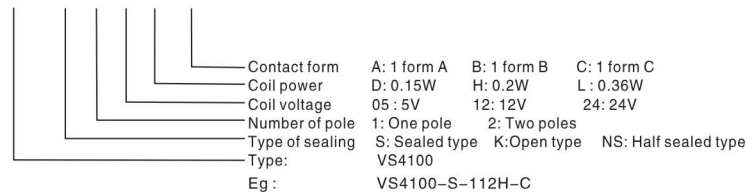

## ② Coil Ratings

Coil voltage(V)	3 5 6 9 12 24
Coil power	0.15W 0.2W 0.36W

## ③ Contact Data

Contact Form	1A 1C
Contact Material	AgNi
Max. Allowable Contact Current(A)	3A
Max.Switching Voltage	240VAC/30VDC
Max.Switching Power	600VA/30W
Rated load	3A 250VAC 30VDC

## ④ Specifications

Insulation Resistance	100mΩ
Dielectric Strength (Between coil and contacts)	1000VAC 1min
Ambient Temperature	-25°C to 70°C
Operate/release time max.	10ms / 5ms
Mechanical Endurance min	1 × 10 <sup>7</sup> ops
Electrical Endurance min	1 × 10 <sup>5</sup> ops

## ⑤ Outline Dimensions ,Wiring Diagram and PCB layout.

