

TELECOM RELAY



To learn more new products and services ,email us or visit our website today .

<http://www.vicon-relay.com>


Type: VS4078



20.2 × 10.0 × 11.5 mm

① Ordering Information

VS4078-S-2 12 H-2C

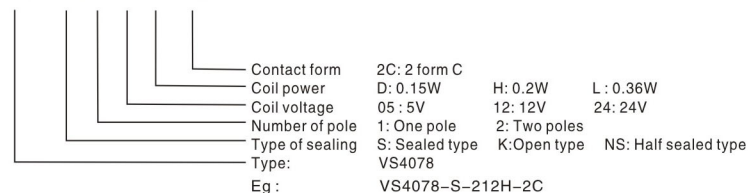

② Coil Ratings

Coil voltage(V)	3	5	6	9	12	24
Coil power	0.15W	0.2W	0.36W			


③ Contact Data

Contact Form	2C
Contact Material	AgNi +Au plated
Max. Allowable Contact Current(A)	2A
Max.Switching Voltage	125VAC/250VDC
Max.Switching Power	125VA/60W
Rated load	1A 120VAC /2A 30VDC

④ Specifications

Insulation Resistance	1000mΩ
Dielectric Strength	
(Between coil and contacts)	1000VAC 1min
Ambient Temperature	-30°C to 70°C
Operate/release time max.	6ms / 4ms
Mechanical Endurance min	1 × 10 ⁷ ops
Electrical Endurance min	1 × 10 ⁵ ops

⑤ Outline Dimensions ,Wiring Diagram and PCB layout.

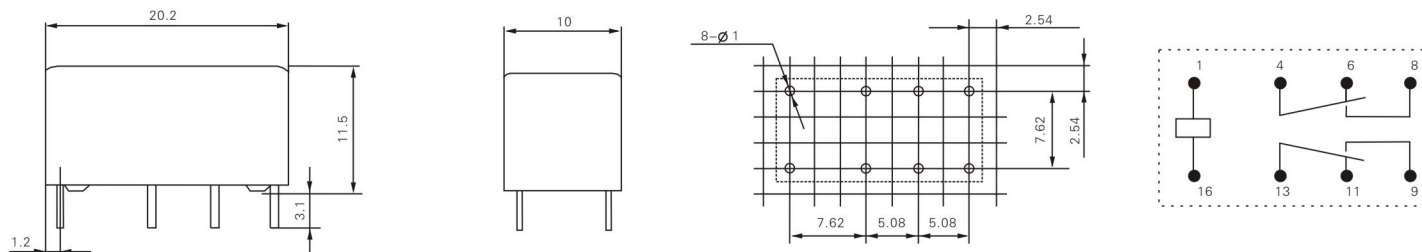

Tolerance : ± 0.2 mm