


## Type: VP38



50.5 × 42.2 × 55.3mm

## ① Ordering Information

VP38 - 12 VDC - 2C

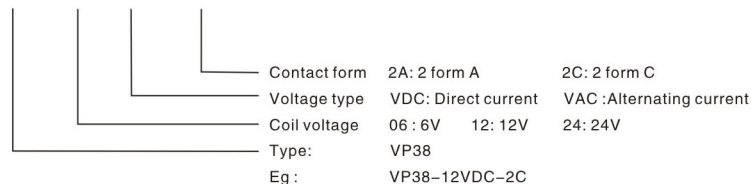

## ② Coil Ratings

Coil voltage(V)	AC: 6 12 24 48 120 220/240
	DC: 6 9 12 24 48 110 220
Coil power	4.5VA / 2.5W




## ③ Contact Data

Contact Form	2A 2B 2C 3A 3B 3C
Contact Material	Silver alloy
Max. Allowable Contact Current(A)	30A
Max. Switching Voltage	250VAC/28VDC
Max. Switching Power	7500VA/840w
Rated load	30A 250VAC/28VDC

## ④ Specifications

Insulation Resistance	1000mΩ
Dielectric Strength	
(Between coil and contacts)	2500VAC
Ambient Temperature	-40°C to 70°C
Operate/release time max.	25ms / 15ms
Mechanical Endurance min	1 × 10 <sup>7</sup> ops
Electrical Endurance min	1 × 10 <sup>5</sup> ops

## ⑤ Outline Dimensions ,Wiring Diagram and PCB layout.



Tolerance : ± 0.2 mm