

POWER RELAY

To learn more new products and services ,email us or visit our website today.

<http://www.vicon-relay.com>


Type: VP40



64.0 × 45.8 × 45mm

① Ordering Information

VP40 - 12 VDC - C

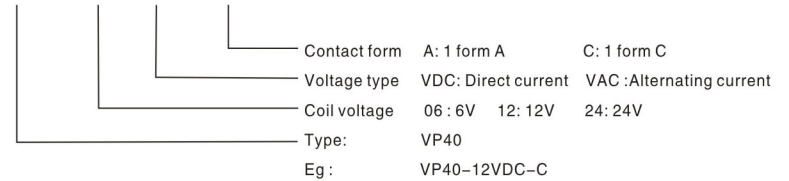

② Coil Ratings

Coil voltage(V)	AC: 6 12 24 48 120 220/240
	DC: 6 9 12 24 48 110 220
Coil power	2.5VA / 2.0W




③ Contact Data

Contact Form	1A 1B 1C
Contact Material	Silver alloy
Max. Allowable Contact Current(A)	40A
Max.Switching Voltage	250VAC/30VDC
Max.Switching Power	10,000VA/1200W
Rated load	40A 250VAC/30VDC

④ Specifications

Insulation Resistance	1000mΩ
Dielectric Strength (Between coil and contacts)	2500VAC
Ambient Temperature	-40°C to 70°C
Operate/release time max.	25ms / 25ms
Mechanical Endurance min	1 × 10 ⁷ ops
Electrical Endurance min	5 × 10 ⁴ ops

⑤ Outline Dimensions ,Wiring Diagram and PCB layout.



Tolerance : ± 0.2 mm

⑥ Packing information: 100pcs/ctn G.W :25 kgs Carton dimensions (CM): 42 × 31 × 45