


Type: VP60



① Ordering Information

VP60 - 12 VDC - C

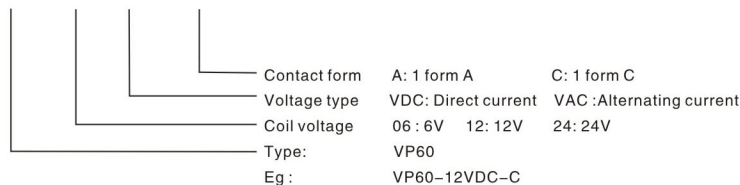

② Coil Ratings

Coil voltage(V)	AC: 6 12 24 48 120 220/240
	DC: 6 9 12 24 48 110 220
Coil power	4.4VA / 3.6W




③ Contact Data

Contact Form	1A 1B 1C
Contact Material	Silver alloy
Max. Allowable Contact Current(A)	100A
Max.Switching Voltage	250VAC/30VDC
Max.Switching Power	15,000VA/1800W
Rated load	100A 250VAC/30VDC

④ Specifications

Insulation Resistance	1000mΩ
Dielectric Strength	2500VAC
(Between coil and contacts)	-40°C to 70°C
Ambient Temperature	25ms / 25ms
Operate/release time max.	1 × 10 ⁷ ops
Mechanical Endurance min	5 × 10 ⁴ ops
Electrical Endurance min	

⑤ Outline Dimensions ,Wiring Diagram and PCB layout.



Tolerance : ± 0.2 mm