

# GENERAL CONTROL RELAY

To learn more new products and services, email us or visit our website today.

<http://www.vicon-relay.com>


## Type: VG14D



29.0 × 12.6 × 20.6 mm

## ① Ordering Information

VG14D-S-2 12 T-2C

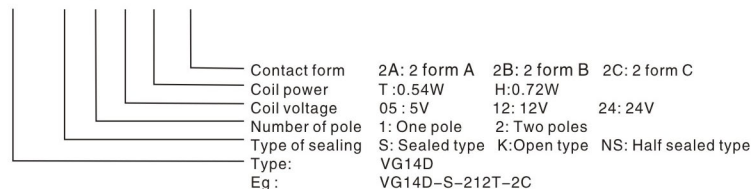

## ② Coil Ratings

Coil voltage(V)	3 5 6 9 12 24 48
Coil power	0.54W 0.72W






## ③ Contact Data

Contact Form	2A 2C
Contact Material	AgSnO <sub>2</sub> , AgCdO
Max. Allowable Contact Current(A)	5A
Max. Switching Voltage	250VAC/30VDC
Max. Switching Power	4000VA/480W
Rated load	5A 250VAC / 30VDC

## ④ Specifications

Insulation Resistance	1000mΩ
Dielectric Strength (Between coil and contacts)	5000VAC 1min
Ambient Temperature	-40°C to 70°C
Operate/release time max.	15ms / 8ms
Mechanical Endurance min	1 × 10 <sup>7</sup> ops
Electrical Endurance min	1 × 10 <sup>5</sup> ops

## ⑤ Outline Dimensions ,Wiring Diagram and PCB layout.



Tolerance : ± 0.2 mm

⑥ Packing information: 1000pcs /ctn G.W :15 kgs Carton dimensions (CM): 39 × 37.5 × 18