


## Type: VG14H



29.0 × 12.6 × 20.6 mm

## ① Ordering Information

VG14H-S- 1 12 T - C

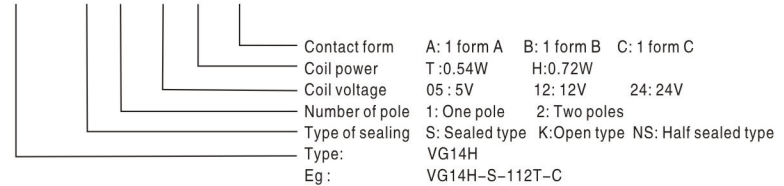

## ② Coil Ratings

Coil voltage(V)	3	5	6	9	12	24	48
Coil power				0.54W	0.72W		


## ③ Contact Data

Contact Form	1A 1C
Contact Material	AgSnO <sub>2</sub> , AgCdO
Max. Allowable Contact Current(A)	16A
Max.Switching Voltage	250VAC/30VDC
Max.Switching Power	4000VA/480W
Rated load	16A 250VAC / 30VDC

## ④ Specifications

Insulation Resistance	1000mΩ
Dielectric Strength	
(Between coil and contacts)	5000VAC 1min
Ambient Temperature	-40°C to 70°C
Operate/release time max.	15ms / 5ms
Mechanical Endurance min	1 × 10 <sup>7</sup> ops
Electrical Endurance min	1 × 10 <sup>5</sup> ops

## ⑤ Outline Dimensions ,Wiring Diagram and PCB layout.

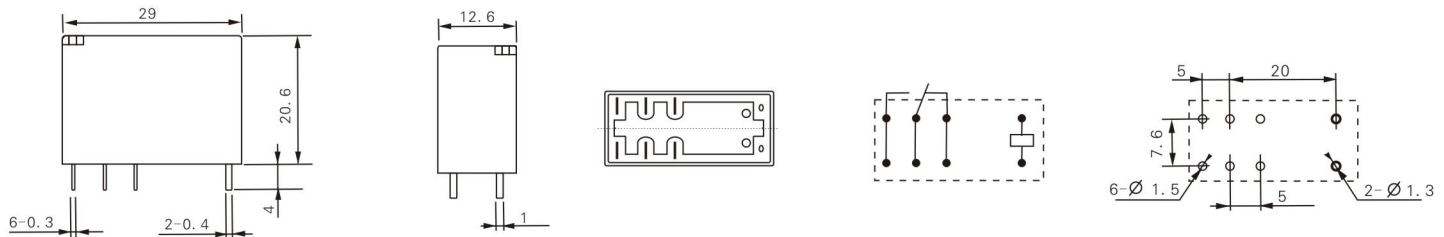

Tolerance : ± 0.2 mm