

EN-SI30 Series




Features

- ◆ Weatherproof IR camera
- ◆ SONY / SHARP Color CCD
- ◆ 30 pieces $\phi 5$ mm IR-LED;
- ◆ Illuminate Distance: 25M
- ◆ Waterproofing Criterion: IP 66



Interface

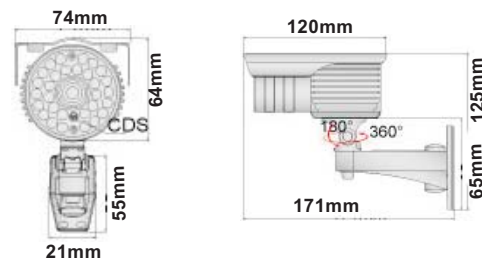

Specifications

Model Name	EN-SI30-38	EN-SI30-35	EN-SI30-32	EN-SI30-82
Image Device	1/3 SONY	1/3 SONY	1/3 SONY	1/4 SHARP
Resolution	540 TVL	480 TVL	420 TVL	420 TVL
Picture Elements	PAL:795(H)×596(V) NTSC:811(H)×508(V)	PAL:752(H)×582(V) NTSC:768(H)×494(V)	PAL:500(H)×582(V); NTSC:510(H)×492(V)	
Min. Illumination	0.2 Lux /F2.0	1.0 Lux /F2.0	0.8 Lux /F2.0	1.0 Lux /F2.0
TV System	PAL/NTSC			
Lens Furnished	6mm/F 2.0 lens			
Infrared Luminary	30 pieces $\phi 5$ mm IR-LED			
Illuminate Distance	25 M			
Wavelength	850 nm			
Waterproofing Criterion	IP 66			
S/N Ratio	More than 48dB			
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000			
Gamma	0.45			
White Balance	Auto			
Gain Control	Auto			
Sync. System	Internal			
Video Output	1 Vp-p / 75 Ohms			
Power Supply	DC12V±10%			
Operation Temperature	-10°C ~ +50°C RH95% Max			
Dimension	163(W) x76(H) x126(D)mm			
Weight	850g			