
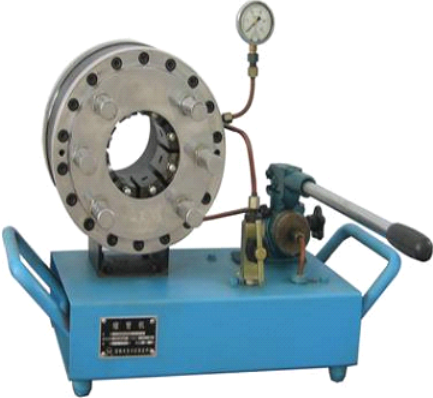




**TIANJIN QIANTONGDA RUBBER PRODUCTS TRADING Co., LTD.**

Room 2-602, No.17, Huanghe Road, Nankai District, Tianjin, China

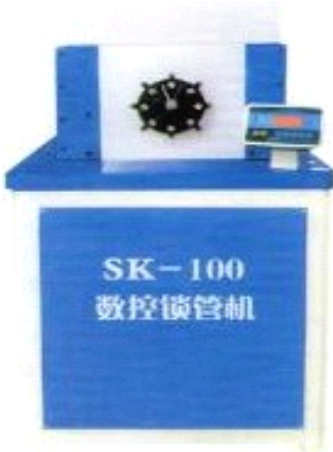
TEL: 86-022-27458396 FAX: 86-022-58193085 Mobile:86-15122864947

Model No.	Technical details	Picture
Manual hose crimping machine (KG-75)	<ol style="list-style-type: none"><li>1. Hose size (mm): 6mm~27mm</li><li>2. Swager force (10KN): 90</li><li>3. Most wire-wound layer: 2</li><li>4. Rated pressure (Mpa): 31.5</li><li>5. Weight (KG): 30</li><li>6. Dimensions (mm): 600*250*300</li><li>7. Dies: 4 sets</li></ol>	 A manual hose crimping machine with a red base and a black die. The die is a large, cylindrical component with a central opening. The machine has a handle and a pressure gauge. A label on the machine reads "KG-75 MANUAL HOSE CRIMPING MACHINE".
Manual hose crimping machine (QTD-32)	<ol style="list-style-type: none"><li>1. Hose size (mm): 6mm~32mm</li><li>2. Oil pump delivery capacity: 30ml</li><li>3. Cylinder thrust: 40T</li><li>4. Weight: 120kg</li><li>5. Measurement: 600*500*370mm</li><li>6. Dies: 8 sets</li></ol>	 A manual hose crimping machine with a blue base and a silver die. The die is a large, cylindrical component with a central opening and a pressure gauge. The machine has a handle and a pressure gauge. A label on the machine reads "QTD-32".

<p>Hose crimping machine (QTD-38)</p>	<ol style="list-style-type: none"> <li>1. Crimping range: <math>\Phi 6\text{mm}-\Phi 38\text{mm}</math></li> <li>2. Rated preeure: 31.5mpa</li> <li>3. The largest crimping pressure: 409T</li> <li>4. Rular precision: 0.02mm</li> <li>5. Oil pump out-let quantity:            5ml/rad/3kw      (380V)            2.5ml/rad/2.2kw   (220V)</li> <li>6. 850 stoke/hour</li> <li>7. Oil tank:60~65L</li> <li>8. Weight:250kg</li> <li>9. Dimension:830*820*860mm</li> <li>10. Dies:6 sets</li> </ol>	
<p>Hose crimping machine (QTD-51)</p>	<ol style="list-style-type: none"> <li>1. Crimping range: <math>\Phi 6\text{mm}-\Phi 51\text{mm}</math></li> <li>2. Rated preeure: 31.5mpa</li> <li>3. The largest crimping pressure: 409T</li> <li>4. Rular precision: 0.02mm</li> <li>5. Oil pump out-let quantity:            5ml/rad/3kw      (380V)            2.5ml/rad/2.2kw   (220V)</li> <li>6. 850 stoke/hour</li> <li>7. Oil tank:60~65L</li> <li>8. Weight:250kg</li> <li>9. Dimension:830*820*860mm</li> <li>10. Dies:10 sets</li> </ol>	

<p>Multi-functional hose crimping machine (QTD-51B)</p>	<ol style="list-style-type: none"> <li>1. Crimping range <math>\phi 6--\phi 51\text{mm}</math></li> <li>2. Mould dimension: 17MM-67mm</li> <li>3. Rated preeure: 31.5mpa</li> <li>4. Rular precision: 0.02mm</li> <li>5. Max locking force: 233T</li> <li>6. Power: 3 Kw</li> <li>7. Working voltage: 220v&amp;380v</li> <li>8. locking rate: 960r/h</li> <li>9. Oil pump out-let quantity: 14.5l/min</li> <li>10. Dimension: 780*570*1180mm</li> <li>11. Weight: 299kgs</li> <li>12. Dies: 10 sets</li> <li>13. Multi-functional: both crimping the hose and peeling the hose</li> </ol>	
<p>Hose crimping machine (QTD-75)</p>	<ol style="list-style-type: none"> <li>1. Locking diameter: 6~76mm</li> <li>2. Electric voltage: 220v&amp;380v</li> <li>3. Power: 7.5KW</li> <li>4. Dimension: 1570*740*1400mm</li> <li>5. Weight: 1200kg</li> <li>6. crimping pressure: 740T</li> <li>7. capacity of tank: 100KG</li> <li>8. rotate speed: 1440r/min</li> <li>9. Dies: 16sets</li> </ol>	

<p>Hose crimping machine (QTD-102)</p>	<ol style="list-style-type: none"> <li>1. Locking diameter: 6~102mm</li> <li>2. Electric voltage: 220v&amp;380v</li> <li>3. Power: 7.5KW</li> <li>4. Dimension: 1800 (L) *840 (W) *1400 (H) mm</li> <li>5. Weight: 1200kg</li> <li>6. crimping pressure: 1000T</li> <li>7. capacity of tank: 100KG</li> <li>8. rotate speed: 1440r/min</li> <li>9. Dies: 18sets</li> </ol>	
<p>Hose crimping machine (QTD-150)</p>	<ol style="list-style-type: none"> <li>1. Locking diameter: 6~150mm</li> <li>2. Electric voltage: 220v&amp;380v</li> <li>3. Power: 7.5KW</li> <li>4. Dimension: 1800 (L) *900 (W) *1500 (H) mm</li> <li>5. Weight: 1500kg</li> <li>6. crimping pressure: 1098T</li> <li>7. capacity of tank: 100KG</li> <li>8. rotate speed: 1440r/min</li> <li>9. Oil pump delivery capacity: 58L/min</li> <li>10. Dies: 18sets</li> </ol>	

<p>Number control hose crimping machine CNC QTD-102</p>	<ol style="list-style-type: none"><li>1. Clip pipe dimension: 4mm-89mm</li><li>2. Rular precision: 0.01mm</li><li>3. Power: 4 kw(oil motor)</li><li>4. Rotational speed: 1440r/min</li><li>5. Oil pimp delivery capacity: 10ml/rad</li><li>6. Measurement: 630*850*1600mm</li><li>7. Weight: 700kg</li></ol>	
---	--	---

Terms and conditions:

Port of shipment: Tianjin

Term of sale: FOB tianjin

Shipment way: by sea

Payment: By T/T, 50% of the total amount paid before production, Balance paid after copy of B/L.

Delivery Time: To be confirmed

contact person:

cindy zhao

MP:+0086 18722032805

MSN:tj-qtd@live

Yahoo:tianjin\_qtd@yahoo.cn

Skype:azhao2009