

## 1 PAIR UTP SOLID CABLE P/N: CLA01




### DESCRIPTION

- Rated temperature: 70 °C
- Reference standard: UL Subject 444, EIA/TIA 568B & ISO/IEC 11801
- Solid bare copper conductor
- Colour-coded PE insulation
- Rip cord (optional)
- PVC or LSZH jacket
- Packaging: Box

### APPLICATION

- Telephony Voice Wiring

### PRODUCT FIGURE

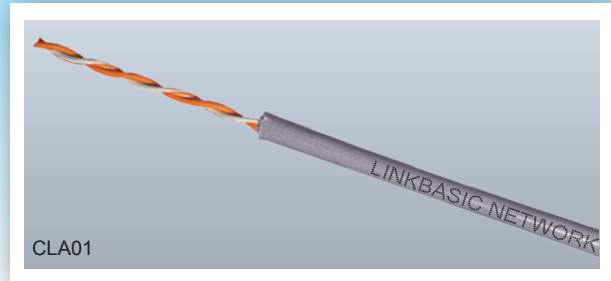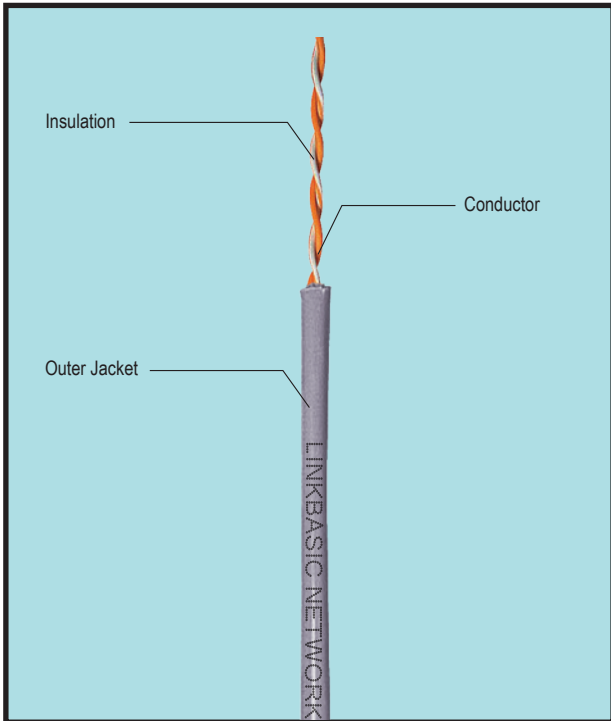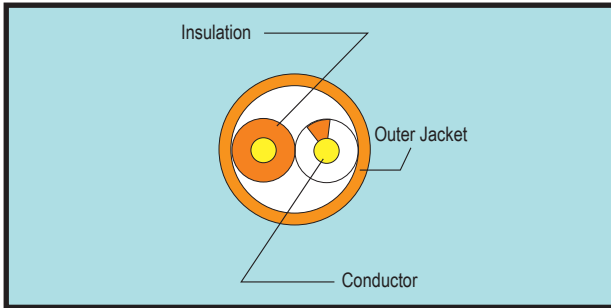

1 pair UTP Solid Cable  
RAL 7004

### CONSTRUCTION

Structure	Construction	UTP
	Number of Pairs	1 Pair
	AWG	24AWG
	Conductor Dimension (mm)	0.50AWG
Insulation	Solid or Stranded; Bare or Tinned	Solid Bare Copper
	Insulation material	HOPE, FRPE
	Insulation Dimension [mm]	0.83
Shield	Number Colour (Ring or Strip marking)	-
	Cross Filler	No
	Individual Shield & Material	No
	Outer Shield & Material	No
Outer jacket	Drain Wire	No
	Outer Jacket Material	PVC or LSZH
	Outer Jacket Ripcord	Per customer request
	Overall Nominal Diameter (mm)	

### MECHANICAL CHARACTERISTICS

Operating Temp. Range	-20~70 °C
Bulk Cable Weight (KG)	5.90KG
Max. Recommended Pulling Tension	-
Min. Bend Radius (Install)	90mm
Flame Test	CMR, CMX, CM

### ORDER INFORMATION

Part number	Description	AWG	Standard color	packing Type	Carton	Carton measurement	Carton weight
CLA01	1 pair UTP Solid Cable	24AWG	RAL7004	Box	500m	L30.5cm x W20cm x H31.5cm	5.90KG