



E27-V



E27-U

## ◆ Scope of Application

Hotel, Office, Home, Shop ,Market, Exhibition hall ,Conference room and the other indoor commercial lighting.

## ◆ Features

### ▲ Good heat dissipation:

Using high thermal conductivity aluminum alloy as the main heat dissipation, good heat dissipation performance.

### ▲ Easy replacement:

Replace the traditional Par30,Par38 light.

### ▲ LED sources:


Applied with the highest-level CREE/SSC/OSRAM LED, low brightness attenuation and lifespan is over 50000hrs.

### ▲ Environmental protection

No any harmful radiate spectrums such as UV or infrared ray included.


## ◆ Technology parameters

Model No.	GK-E27-V-5W	GK-E27-V-7W	GK-E27-U-9W	GK-E27-U-12W
Power	5W	7W	9W	12W
Input Voltage	85-265VAC			
LED Qty	5pcs	7pcs	9pcs	12pcs
Lumen	CW:375Lm WW:325Lm	CW:525Lm WW:455Lm	CW:675Lm WW:585Lm	CW:900Lm WW:780Lm
CCT (k)	WW:2700-3500 SW:3800-4500 CW:5000-6500			
Beam Angle	25,45,60 deg.			
Base Type	E26/E27			
Lifespan	50,000hours			
Body Material	Aluminum			

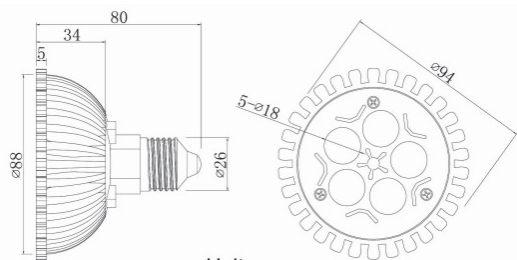

Unit : mm

Par30

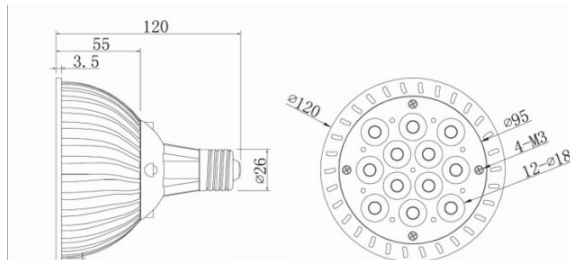

Unit : mm

Par38

