



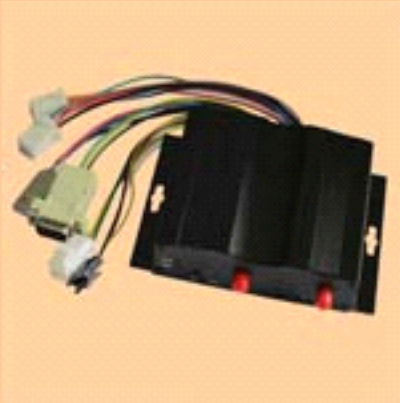



ZL ELECTRONICS TECHNOLOGY (HK) CO., LIMITED




ADD: 6F,SHUN ON COMMERCIAL BUILDING,122-124 DES VOEUX ROAD,CENTRAL,HONGKONG

Tel: 0086-755-81488669 Fax: 0086-755-81488669

E-mail: Cathyzhang22sz@gmail.com Skype: gps.tracker.cathy

Model	Item	Specifiction	Packing terms
900C		<p>Basic function model</p> <ol style="list-style-type: none"> 1. Band: 900MHz/1800MHz and 850MHz/1900MHz; 2. Listen-in or Two-way Audio (Use the SMS to set the communication mode); 3. 850mAh Internal Backup Battery 4. Overspeed alarm, MainPower off alarm 5. Remote cut off oil and engine, vibration alarming, door opening alarming; 6. Dimensions: 118 x 70 x 24mm 	<p>White box: 210*140*70MM</p> <p>Carton weight: 0.6kg</p>
900E		<p>Expand function model</p> <ol style="list-style-type: none"> 1. Band: 900MHz/1800MHz and 850MHz/1900MHz; 2. Listen-in or Two-way Audio (Use the SMS to set the communication mode); 3. 850mAh Internal Backup Battery; 4. Overspeed alarm, MainPower off alarm; 5. Remote cut off oil and engine, vibration alarming, door opening alarming; 6. Internal 2Mb Flash Memory for Logging when the device in the gprs blind area; 7. Support the monitor camera; 8. Support other RS232 peripheral such as LCD(Optional); 9. Support temperature sensor(Optional); 10. Dimensions: 118 x 70 x 24mm 	<p>White box: 210*140*70MM</p> <p>Carton weight: 0.6kg</p>

900G		<p>Excessive function model</p> <ol style="list-style-type: none"> 1. Band: 900MHz/1800MHz and 850MHz/1900MHz; 2. Listen-in or Two-way Audio (Use the SMS to set the communication mode); 3. 850mAh Internal Backup Battery; 4. Overspeed alarm, MainPower off alarm; 5. Remote cut off oil and engine, vibration alarming, door opening alarming; 6. Internal 2G TF card for logging all data; 7. Support the monitor camera; 8. Support RFID reader; 9. Support Thermal Printer; 10. Dimensions: 130 x 100 x 30mm 	<p>White box: 210*140*70MM</p> <p>Carton weight: 0.6kg</p>
Camera		<p>TTL monitor camera</p> <ol style="list-style-type: none"> 1. Optional accessory for 900E/900G 2. IR color cmos camera 3. Baud rate 9600; 4. Black 4wire joint; 5. Dimensions: 100 x 100 x 90mm 	<p>Box: 100 x 100 x 90MM</p> <p>Carton weight: 0.2kg</p>
Relay		<p>Relay</p> <ol style="list-style-type: none"> 1. Optional accessory for all model; 2. Be used to cut fuel or circuit; 	
Setting line		<p>Setting Line</p> <ol style="list-style-type: none"> 1. Optional accessory for 900E/900G; 2. Be used to set parameter; 	

Temperature Sensor		<p style="text-align: center;">Temperature Sensor</p> <ol style="list-style-type: none"> 1. Optional accessory for 900E; 2. Measuring range: -55~125 centigrade; 3. Leadwire length: 10M; 	
RFID reader		<p style="text-align: center;">RFID reader</p> <ol style="list-style-type: none"> 1. Optional accessory for 900G; 2. Dimensions: 100 x 80 x 40mm 	
Thermal Printer		<p style="text-align: center;">Thermal Printer</p> <ol style="list-style-type: none"> 1. Optional accessory for 900G; 2. Dimensions: 150 x 100 x 90mm 	

1. Warranty: 2-year Manufacturer warranty
2. Delivery time: Production time:subject to products or parts availability+ delivery time by Express(3-5 working days)
3. Package: box
4. If there is big change of cost of material or exchange rate, the price will be invalid.