

SHENZHEN BRILLIANT CRYSTAL TECHNOLOGIC CO.,LTD.

深 圳 市 彩 晶 科 技 有 限 公 司

The specification for the following models :

CM802-1SEYAA-5

PROPOSED BY		APPROVED
Design	Approved	

TEL:+86-755-29995238

FAX:+86-755-29459900

Http://www.cj86.com

E-mail:szcj86@gmail.com

Http://www.szcm-lcd.com


E-mail:szcj86@hotmail.com

地址：深圳市南山区西丽留仙洞工业区顺和达厂区 B 栋

1. Mechanical Specification

ITEM	STANDARD VALUE			UNIT
NUMBER OF CHARACTERS	8 CHARACTERS X 2 LINES			--
CHARACTER FORMAT	5 X 8 DOTS			--
MODULE DIMENSION	40.0 (W) X 35.5 (H) X 7.5 (T)			mm
VIEWING DISPLAY AREA	30.0(W) X 14.0 (H)			mm
ACTIVE DISPLAY AREA	25.74 (W) X 9.48 (H)			mm
CHARACTER SIZE	2.75 (W) X 4.49 (H)			mm
CHARACTER PITCH	3.25 (W) X 4.99(H)			mm
DOT SIZE	0.5 (W) X 0.5 (H)			mm
DOT PITCH	0.07 (W) X 0.07 (H)			mm
DRIVE METHOD	1/16 Duty , 1/5BIAS			
VIEWING DIRECTION	12'clock			
EL Use Inverter Type	SDEC-I001A			
Inverter Input	DC +5V	V	25	mA
Inverter Output	AC 90 ~ 110	V	400 ~ 700	Hz
Backlight Half-Lift Time	4,000			HR.
LED Backlight Color	Yellow Green			
Backlight Input	DC +5.0V	V		mA
LED backlight current				mA
Backlight Half-Lift Time	35000			HR.
INPUT VOLTAGE	DC +5.0V	V	1	mA
LCD DRIVER	SPLC780D			
Weight	13g			

2. Mechanical Diagram

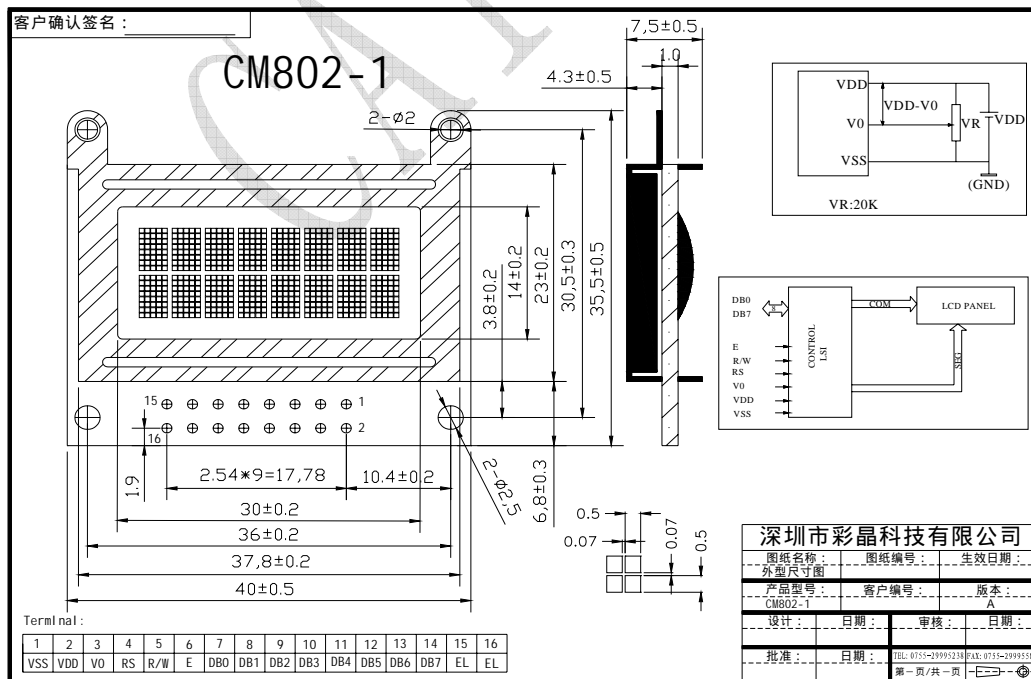

3. Interface Pin Connections

NO	SYMBOL	LEVEL	FUNCTION
1	VSS	--	GND (0V)
2	VDD	--	DC +5V
3	VO	--	Contrast Adjust
4	RS	H/L	Register select
5	R/W	H/L	Read/Write
6	E	H,H→L	Enable signal
7	DB0	H/L	Data Bit 0
8	DB1	H/L	Data Bit 1
9	DB2	H/L	Data Bit 2
10	DB3	H/L	Data Bit 3
11	DB4	H/L	Data Bit 4
12	DB5	H/L	Data Bit 5
13	DB6	H/L	Data Bit 6
14	DB7	H/L	Data Bit 7
15	EL	--	(EL Backlight 1)
16	EL	--	(EL Backlight 2)

4. Absolute Maximum Ratings

ITEM	SYMBOL	MIN.	TYPE	MAX.	UNIT
OPERATING TEMPERATURE	TOP	0/-20	--	+50/+70	
STORAGE TEMPERATURE	TST	-10/-30	--	+60/+80	
INPUT VOLTAGE	VI	4.75	5.0	5.25	V
SUPPLY VOLTAGE FOR LOGIC	VDD-VSS	--	5.0	5.5	V
SUPPLY VOLTAGE FOR LCD	VDD-VO	--	--	5.0	V
STATIC ELECTRICITY	Be sure that you are grounded when handing LCM.				