


● Introduction

- I KHX's HVB Resistor series are primarily designed for high voltage, power charging/discharging circuits, surge energy applications and conform to RoHS directive and lead-free.
- II For customized designs, tighter tolerances, non-standard technical requirements, or custom special applications, please contact our sales for more information.
- III The HVB is perfect for medical defibrillators.
- IV Surface insulation optional palm red or green.
- V Compared with HVA, the HVB offers more choices for customer.

● Construction

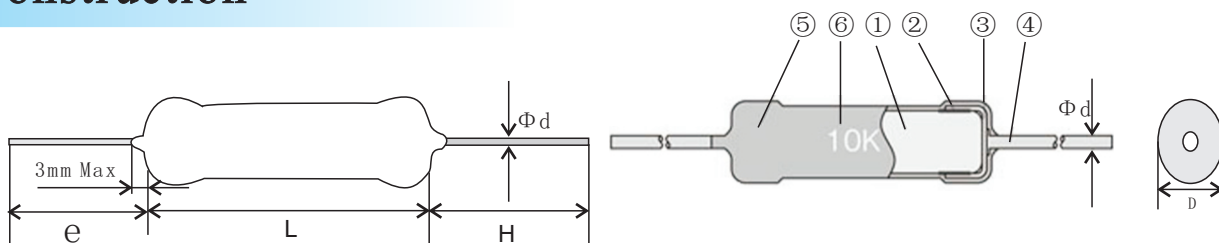

①	Resistive body	④	Lead wire
②	Inner electrode	⑤	Coating
③	Electrode cap	⑥	Marking

● Features

- I Special ceramic resistor , was made of Clay , Silicon dioxide and Porcelain cement . After sintering under high temperature and high voltage , the resistor core was build ,then take the insulation coating.
- II Saver than the wire-wound resistor and film resistor , which will avoid the wire disconnecting and the film breaking up .
- III High peak power can be reached at 5KW-30KW in short time
- IV Good performance in bearing high voltage and high current
- V Products meet the RoHS requirments.


● Applications

- I Radar, Motor Drives, Broadcast Transmitters,
- II X-Ray, Lasers, Medical Defibrillators.
- III Dynamic Braking, Soft-start/Current-limit.
- IV Snubber Circuits, Dummy Loads, Energy Research.
- V RF Amplifiers, Semiconductor Process, Power Conditioning .

● Dimensions

Type	Dimensions(mm)				Weight(g) (1000pcs)
	L±1.0	D±0.5	d	H±3	
HVB1/2	11	3.5	0.8	38.0	700 ± 10
HVB1	16	4.5			1250 ± 10
HVB2	18	6.0			1450 ± 10
HVB3	21	6.0			1800 ± 20
HVB4	26	6.0			2800 ± 30
HVB5	38	7.0	1.0		6000 ± 30
HVB7	44	7.5			8000 ± 50

● Derating Curve

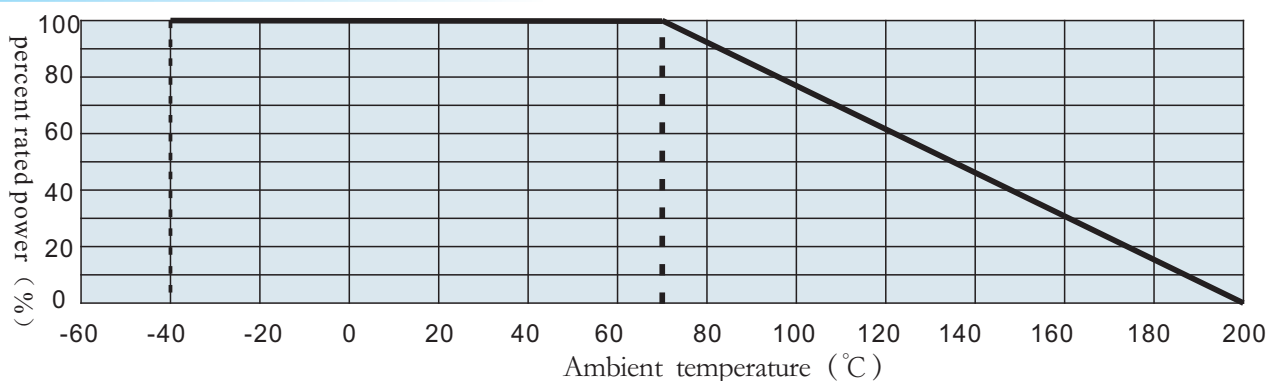

For resistors operated at an ambient temperature of 70°C or above, the power rating should be derated in accordance with the above derating curve.


● Power And Resistance etc

Type	Power rating	Resistance range(Ω)		T.C.R ($\times 10^{-6}/K$)	Max. Working	Max. overload voltage	Max. pulse voltage	Rated Ambient Temperature	Operating temp Range
		K: $\pm 10\%$ E12	M: $\pm 20\%$ E6						
HVB1/2	0.5W	10-390K	3.3-330K	-900 ± 300 :R < 100 Ω -1200 ± 300 :R $\geq 100\Omega$	200V	400V	8KV	+40 $^{\circ}$ C	-40 $^{\circ}$ C - 200 $^{\circ}$ C
HVB1	1W				300V	600V	15KV		
HVB2	2W				400V	800V	25KV		
HVB3	3W				450V	900V	25KV		
HVB4	4W				500V	1000V	25KV		
HVB5	5W				550V	1100V	25KV		
HVB7	7W				600V	1300V	30KV		

Remark:

- I Rated Ambient Temperature: +70 $^{\circ}$ C.
- II Operating temperature range: -40 $^{\circ}$ C \sim +200 $^{\circ}$ C.
- III Rated voltage = $\sqrt{\text{power rating} \times \text{resistance value}}$ or Max. working voltage, whichever is lower.
- IV The maximum pulse voltage in the "resistance to pulse" examination condition of the performance column.

● Pulse Limiting Power (Po) One Pulse

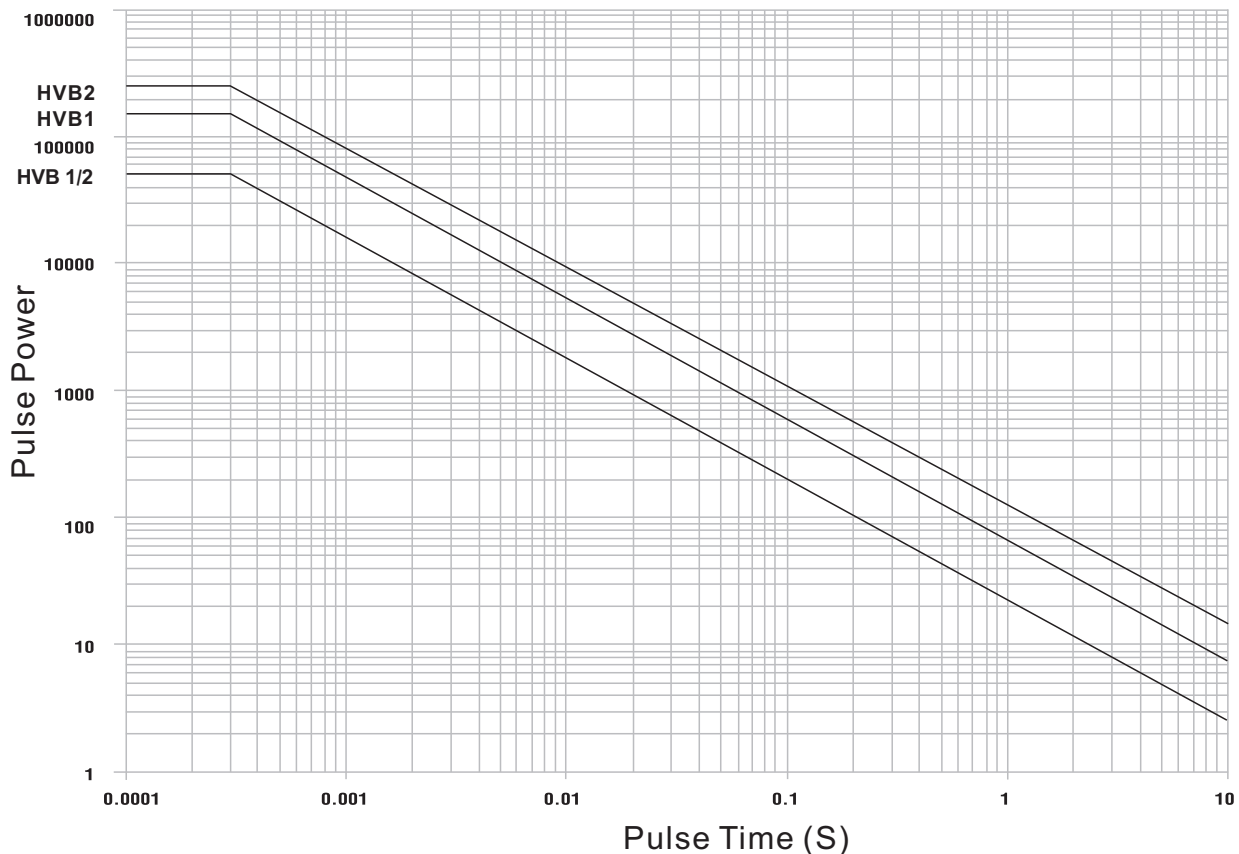

● Performance (Reference Standards: IEC60115-1 and JIS C5201-1)

Test Items	Performance Requirements $\Delta R \pm (\% + 0.05\Omega)$		Test Methods		
	Limit	Typical			
Resistance	Within specified tolerance	—	25°C	Measuring voltage	
			Resistance		
			3.3Ω-8.2Ω		0.3V
			10Ω-82Ω		1.0V
			100Ω-390KΩ	3.0V	
T.C.R	-900±300°C*10 ⁻⁶ /K (R<100Ω) -1200±300°C*10 ⁻⁶ /K (R≥100Ω)	—	+25°C/-40°C, and +25°C/+125°C		
Voltage Coefficient (Apply for 1KΩ or over)	0~-0.20%/V (HVB1/2) 0~-0.10%/V (HVB1) 0~-0.05%/V (HVB2,3,4,5)	—	Rated voltage and rated voltage*10%		
overload(short time)	≤ΔR±(2%+0.05Ω)	0.4	Rated voltage*2.5 or Max.overload vol. whichever is lower for 5s		
Resistance to pulse	≤ΔR±(5%+0.05Ω)	—	The resistor mounted on to the test circuit as below is applied with high voltage impulse 10,000 cycles. <div style="text-align: center;"> </div>		
Resistance to soldering heat	≤ΔR±(2%+0.05Ω)	0.8	350°C±10°C、3.5S±0.5S		
Rapid change of temperature	≤ΔR±(2%+0.05Ω)	0.4	-40°C (30min) /+85°C (30min) 5 cycles		
Moisture resistance	≤ΔR±(5%+0.05Ω)	0.6	40°C±2°C.90%-95%RH,1000h 1.5h ON\0.5h OFF cycles		
Load life	≤ΔR±(5%+0.05Ω)	0.4	40°C±2°C,1000h 1.5h ON\0.5h OFF cycles		
High temperature exposure	≤ΔR±(5%+0.05Ω)	1.7	+200°C, 1000h		
Resistance to solvent	No abnormality in appearance. Marking shall be easily legible	—	Dipping in IPA or Xylene for 3 min.and leaving for 10 min.after removing drops,then brushing 10 times.		

When testing the resistance value ,the ambient temperature should keep at 25°C ±2°C and the moisture keep at 65%

● Type Designation

Example

HVB	1	C	T631	R	103	K
Product code	Power rating	Terminal Surface Material	Taping	Packing	Nominal Resistance	Resistance Tolerance
	1/2: 0.5W 1 : 1.0W 2 : 2.0W 3 : 3.0W 4 : 4.0W 5 : 5.0W	C : SnCu			3 digits	K: ± 10% M: ± 20%