


MATERIALS:
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.
 CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT,
 TIN PLATING OVER NICKEL IN SOLDER AREA.
 SHIELD: BRASS PLATING NICKEL/LEAD ALLOY.

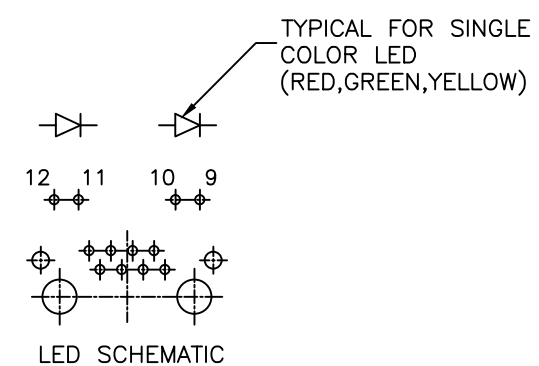

Electrical:
 1.Voltage Rating:125 Vac Rms.
 2.Current Rating:1.5 Amp.
 3.Contact Resistance:40 Milliohms Max.
 4.Insulation Resistance:1000 Megohms Min @500 Vdc.
 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:
 1.Operating:750 Cycles Min.

Environmental:
 1.Storage:-40°C To +85°C.
 2.Operation:-20°C To +75°C.

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

J-CON			
UNIT	SCALE	SHEET	TITLE :
mm	2/1	1 of 1	
DRAWN BY	APPROVED BY		
Alan 110103	Alan 110103		J099 8P8C JACK 4PORT W/LED(G-Y)
General tolerance			DRAW NO :
xxx	±0.10		
xx	±0.25		
x	±0.38		
x	±0.50		
ANG	±3°		
REV	DESCRIPTION	DATE	J099420151-G-Y

REV. A