

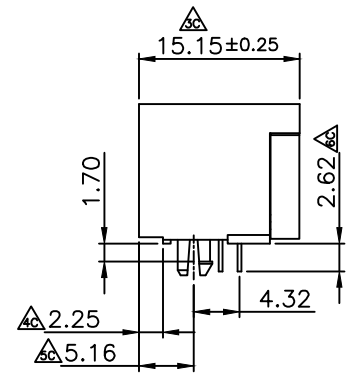
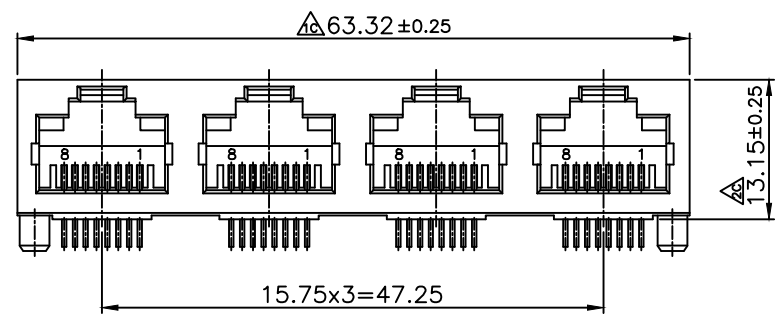


A

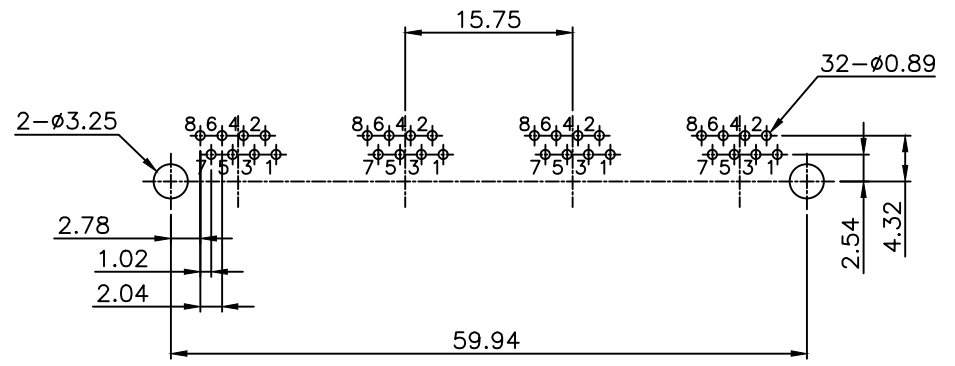

B

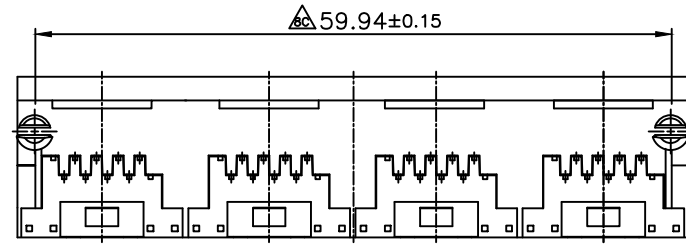

MATERIALS:
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.
 CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT,
 TIN PLATING OVER NICKEL IN SOLDER AREA.

C

Electrical:
 1.Voltage Rating:125 Vac Rms. LED SCHEMATIC
 2.Current Rating:1.5 Amp.
 3.Contact Resistance:40 Milliohms Max.
 4.Insulation Resistance:1000 Megohms Min @500 Vdc.
 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

BOM NO:
 GF": J099420050
 6u": J099420051
 6u": J099420052
 6u": J099420053
 6u": J099420054

Mechanical:
 1.Operating:750 Cycles Min.
Environmental:
 1.Storage:-40°C To +85°C.
 2.Operion:-20°C To +75°C.

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

P.C.B LAYOUT/TOP VIEW

D

J-CON			
UNIT	SCALE	SHEET	TITLE :
mm	2/1	1 of 1	J099 8P8C JACK 4PORT
DRAWN BY	APPROVED BY		
Alan	Alan		
110103	110103		
General tolerance			
xxx	±0.10	DRAW NO : J099420051	
xx	±0.25		
x	±0.38		
x	±0.50		
ANG	±3°	REV. A	
REV	DESCRIPTION		