
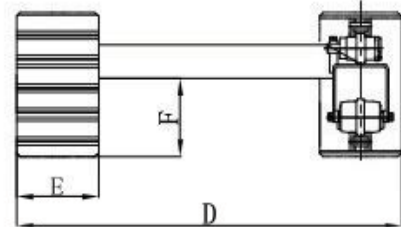


TRACK UNDERCARRIAGE

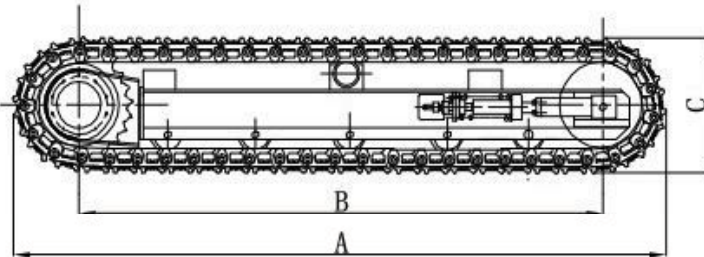

STEEL TRACK UNDERCARRIAGE





| MODEL | A | B | C | D | E | F | No. of roller | Dinamic capacity | Static capacity | Weight kg. | Reduct. Ratio | Hydr. engine Cc | Press. Bar | oil flow L/min | Torque Nm to engine | Grad. |
|----------|------|------|-----|------|---------|-----|---------------|------------------|-----------------|------------|---------------|-----------------|------------|----------------|---------------------|-------|
| ST-3500 | 2030 | 1500 | 485 | 1800 | 300 | 225 | 4+4 | 3500 | 4000 | 750 | 53.7 | 23.5/14.7 | 220 | 35 | 4723 | 60% |
| ST-6000 | 2467 | 1950 | 549 | 1700 | 300-400 | 240 | 5+5 | 6000 | 7000 | 1350 | 53.7 | 43.7/22.7 | 220 | 55 | 8330 | 60% |
| ST-8000 | 2783 | 2265 | 548 | 1800 | 400-450 | 255 | 8+8 | 8000 | 9500 | 1830 | 53.7 | 46.6/27.6 | 300 | 82 | 11700 | 60% |
| ST-10000 | 3800 | 3200 | 600 | 1700 | 400-500 | 280 | 9+9 | 10000 | 11300 | 2350 | 53.7 | 55.8/32.6 | 350 | 100 | 14800 | 60% |
| ST-12000 | 3282 | 2575 | 720 | 2000 | 400-600 | 345 | 9+9 | 12000 | 15000 | 2950 | 54 | 76.6/44.8 | 350 | 124 | 22500 | 60% |
| ST-15000 | 3666 | 2923 | 753 | 2000 | 500-800 | 360 | 8+8 | 15000 | 18000 | 3300 | 53.7 | 79.5/46.7 | 350 | 140 | 24000 | 60% |
| ST-20000 | 4065 | 3323 | 786 | | 500-800 | 375 | 8+8 | 20000 | 25000 | 4850 | 48 | 146.5/95 | 350 | 220 | 38000 | 60% |
| ST-30000 | 4530 | 3730 | 836 | | 500-800 | 405 | 9+9 | 30000 | 37000 | 5850 | 66.4 | 173/101 | 330 | 260 | 59000 | 60% |
| ST-40000 | 4888 | 4090 | 880 | | 500-800 | 420 | 10+10 | 40000 | 480000 | 7300 | 70.1 | 185/114 | 350 | 290 | 72800 | 60% |

* for above specification, it is for your reference.

We can also design and manufacturer the undercarriage based on your requirements for different kinds of dimensions.

Contact: Cathy Email: kemercn@hotmail.com

TRACK UNDERCARRIAGE

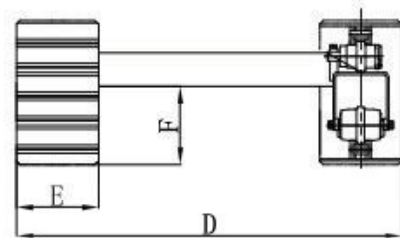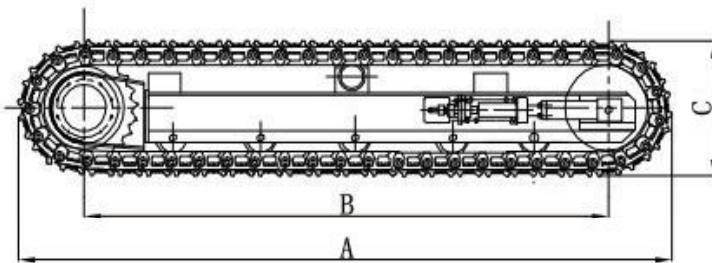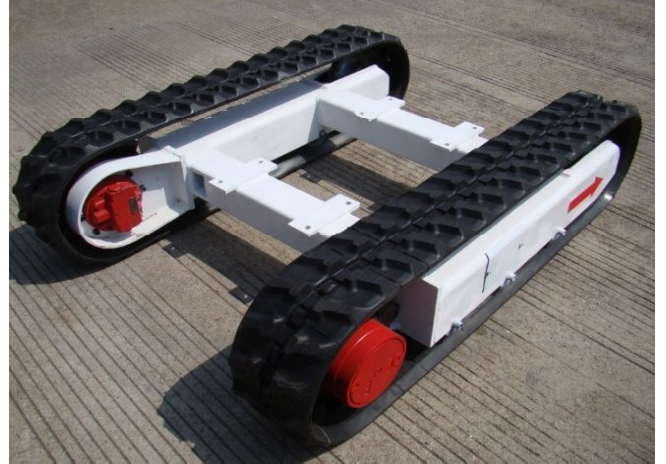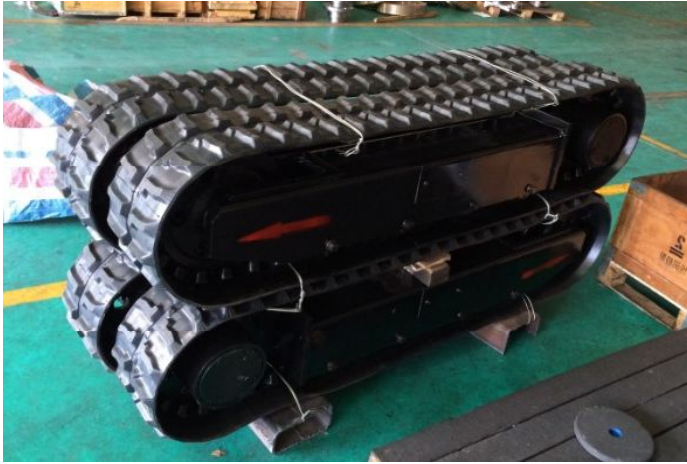

RUBBER TRACK UNDERCARRIAGE

| MODEL | A | B | C | D | E | F | N°of roller | Dinamic capacity | Static capacity | Weight kg. | Reduct. Ratio | Hydr. engine Cc | Press. Bar | oil flow L/min | Torque Nm to engine | Grad. |
|---------|------|------|-----|------|-----|-----|-------------|------------------|-----------------|------------|---------------|-----------------|------------|----------------|---------------------|-------|
| RT-1500 | 1420 | 1066 | 350 | 980 | 230 | 165 | 3+3 | 1200 | 1500 | 330 | 31 | 16.1 | 270 | 17 | 2000 | 60% |
| RT-2500 | 1850 | 1370 | 480 | 1220 | 250 | 245 | 4+4 | 2500 | 3000 | 380 | 53.7 | 23.5/14.7 | 220 | 35 | 4723 | 60% |
| RT-3500 | 1980 | 1511 | 500 | 1520 | 300 | 250 | 5+5 | 3500 | 4000 | 650 | 53.7 | 23.5/14.7 | 220 | 35 | 4723 | 60% |
| RT-5000 | 2500 | 1950 | 550 | 1800 | 350 | 265 | 6+6 | 5000 | 6000 | 900 | 53.7 | 43.7/22.7 | 220 | 55 | 8330 | 60% |
| RT-6000 | 2905 | 2355 | 550 | 1800 | 400 | 265 | 7+7 | 6000 | 7000 | 1280 | 53.7 | 43.7/22.7 | 220 | 55 | 8330 | 60% |
| RT-8000 | 2950 | 2450 | 600 | 1800 | 400 | 310 | 7+7 | 8000 | 9500 | 1550 | 53.7 | 46.6/27.5 | 300 | 82 | 11700 | 60% |

* for above specification, it is for your reference.

We can also design and manufacturer the undercarriage based on your requirements for different kinds of dimensions.

Contact: Cathy Email: kemercn@hotmail.com

QUOTATION FORM

Manufacturer of Track Undercarriage


Customer name _____
 * Contact name _____
 Contact email _____
 Telephone _____

Offer needed within:

Type of Machine

- | | | |
|-----------------------------------|---|---|
| <input type="checkbox"/> Drilling | <input type="checkbox"/> Excavator | <input type="checkbox"/> Forestal Machine |
| <input type="checkbox"/> Crane | <input type="checkbox"/> Trencher | <input type="checkbox"/> other _____ |
| <input type="checkbox"/> Crusher | <input type="checkbox"/> Pipelayer | _____ |
| <input type="checkbox"/> Conveyor | <input type="checkbox"/> Paving Machine | _____ |

Undercarriage type

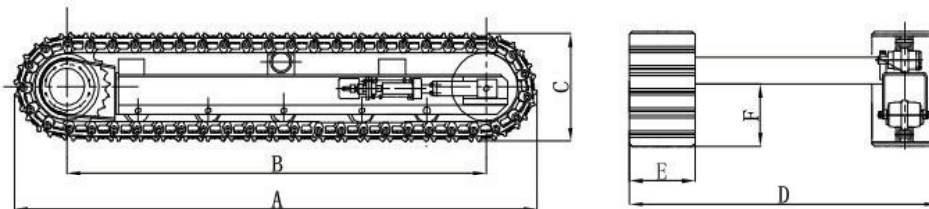

Dimensions

- A** - Undercarriage total length (mm) (*) _____
- B** - Distance from centre of sprocket to centre of idler (mm) _____
- C** - Frame height (mm) _____
- D** - Track width (mm) (*) _____
- E** - Track shoe width (mm) (*) _____
- F** - Height of cross member (mm) _____

Technical Datas

- Machine gross weight (Without the weight of undercarriage)(Kg) (*) _____
- Gradeability (%) _____
- Maximum machine speed (km/h) _____
- Ground pressure (kg/cm²) _____
- Oil flow per side (liter/minute) (*) _____
- Max oil pressure (bar) (*) _____

Describe how machine operates and machine duty cycle in detail

*= required.

Contact: Cathy Email: kemercn@hotmail.com