



IN HOME ENTERPRISE LIMITED

英鋒電子實業有限公司

Tel: 86-769-83665005

Fax: 86-769-23104522




Web: www.inhomelight.com

Email: sales04@inhomelight.com

LED Marine Light Price List

Quotation NO. 150720

From :Sally

Product Picture		Product Specifications		
	Item No	IH-Marine-LED--6D57P	6PC 5730 , 3W	Aluminum radiator 3M tape Suitable for lighting or decoration in the ship inside and outside
	Leds	6PC 0.5W		
	Voltage	DC12V		
	Lumen	120LM		
	Power cord	15CM		
	Waterproof	IP67		
	Size	Φ22 * 5MM		
	Item No	IH-Marine-LED--9D57P	9PC 5730 , 4.5W	Aluminum radiator 3M tape Suitable for lighting or decoration in the ship inside and outside
	Leds	9PC 0.5W		
	Voltage	DC12V		
	Lumen	160LM		
	Power cord	15CM		
	Waterproof	IP67		
	Size	Φ30 * 5MM		
	Item No	IH-Marine-LED--18D57P	18PC 5730 , 9W	Aluminum radiator 3M tape Suitable for lighting or decoration in the ship inside and outside
	Leds	18PC 0.5W		
	Voltage	DC12V		
	Lumen	280 LM		
	Power cord	15CM		
	Waterproof	IP67		
	Size	Φ38 * 5MM		


6 * 1W Surface Mount Marine Light - SS316 Housing

	1.LED Chip Brand: -- 2.Working Voltage(V): DC11-14(built-in IC) 3.Working Current(mA): 600 4.Emitting Angle of Peak(θ): 180 5.Unit: Piece 6.Package Size(cm): 11.5x5x21 7.Product Description: -- 8.Waterproof Level: IP68 9.Case Material: Stainless Steel					
						
Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW (g)	GW (g)
IH-Marine Light-6*1wR	6W	Red	630	220-270	370	415
IH-Marine Light-6*1wG	6W	Green	520	380-430	378	421
IH-Marine Light-6*1wB	6W	Blue	460	60-90	378	421
IH-Marine Light-6*1wY	6W	Yellow	590	220-270	378	421
IH-Marine Light-6*1wW	6W	White	/	420-500	378	421

3 * 2W Surface Mount Marine Light - SS316 Housing



- 1.LED Chip Brand: --
- 2.Working Voltage(V): DC11-14(built-in IC)
- 3.Working Current(mA): 500
- 4.Emitting Angle of Peak(θ): 120
- 5.Unit: Piece
- 6.Package Size(cm): 11.5x5x21
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: Stainless Steel

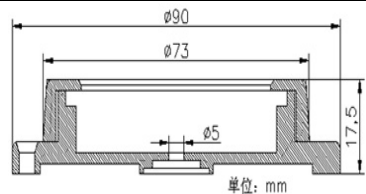


Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Marine Light-3*2wR	6W	Red	630	220-260	360	400
IH-Marine Light-3*2wG	6W	Green	520	360-410		
IH-Marine Light-3*2wB	6W	Blue	460	60-90		
IH-Marine Light-3*2wY	6W	Yellow	590	220-260		
IH-Marine Light-3*2wW	6W	White	/	410-500		

6 * 2W Surface Mount Marine Light -SS316 Housing



- 1.LED Chip Brand: --
- 2.Working Voltage(V): DC11-14(built-in IC)
- 3.Working Current(mA): 800
- 4.Emitting Angle of Peak(θ): 120
- 5.Unit: Piece
- 6.Package Size(cm): 11.5x5x11
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: Stainless Steel

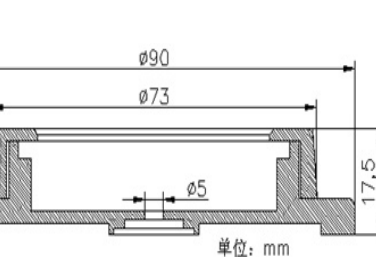


Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Marine Light-6*2wR	12W	Red	630	400-430	612	650
IH-Marine Light-6*2wG	12W	Green	520	600-660		
IH-Marine Light-6*2wB	12W	Blue	460	120-140		
IH-Marine Light-6*2wY	12W	Yellow	590	400-430		
IH-Marine Light-6*2wW	12W	White	/	720-760		

6 * 3W Surface Mount Marine Light - SS316 Housing



- 1.LED Chip Brand: Cree
- 2.Working Voltage(V): DC9V(outside driver's input voltage is 8-28VDC and 9V output)
- 3.Working Current(mA): 1000
- 4.Emitting Angle of Peak(θ): 30
- 5.Unit: Piece

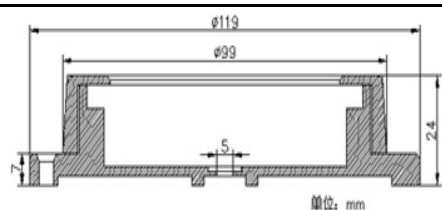


- 6.Package Size(cm): 11.5x5x11
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: Stainless Steel

Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Marine Light-6*3wR	18W	Red	630	400-430	612	650
IH-Marine Light-6*3wG	18W	Green	520	600-660		
IH-Marine Light-6*3wB	18W	Blue	460	120-140		
IH-Marine Light-6*3wY	18W	Yellow	590	400-430		
IH-Marine Light-6*3wW	18W	White	/	720-760		

6 * 3WC2 Surface Mount Marine Light - SS316 Housing



- 1.LED Chip Brand: Cree
- 2.Working Voltage(V): DC8-28V with outside driver
- 3.Working Current(mA): 1000
- 4.Emitting Angle of Peak(θ): 30
- 5.Unit: Piece
- 6.Package Size(cm): 14x6.5x21
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: Stainless Steel




Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Marine Light-6*3wRC2	18W	Red	630	400-430	967	1072
IH-Marine Light-6*3wGC2	18W	Green	520	600-660		
IH-Marine Light-6*3wBC2	18W	Blue	460	120-140		
IH-Marine Light-6*3wYC2	18W	Yellow	590	400-430		
IH-Marine Light-6*3wWC2	18W	White	/	720-760		

6 * 3W RGB Surface Mount Marine Light - SS316 Housing




- 1.LED Chip Brand: Cree
- 2.Working Voltage(V): DC8-28V with outside driver
- 3.Working Current(mA): --
- 4.Emitting Angle of Peak(θ): 30
- 5.Unit: Piece
- 6.Package Size(cm): 14x6.5x21
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: Stainless Steel



Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Marine Light-6*3wRGB	18W	Red	630	400-430	967	1072
		Green	520	600-660		
		Blue	460	120-140		

9 * 3W Surface Mount Marine Light - SS316 Housing




- 1.LED Chip Brand: Cree
- 2.Working Voltage(V): DC8-28V with outside driver
- 3.Working Current(mA): 1500
- 4.Emitting Angle of Peak(θ): 30
- 5.Unit: Piece
- 6.Package Size(cm): 14x6.5x21
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: Stainless Steel

7.Product

Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Marine Light-9*3wR	27W	Red	630	600-650	838	998
IH-Marine Light-9*3wG	27W	Green	520	870-920		
IH-Marine Light-9*3wB	27W	Blue	460	180-230		
IH-Marine Light-9*3wY	27W	Yellow	590	600-650		
IH-Marine Light-9*3wW	27W	White	/	1000-1200		


6 * 3WC3 Surface Mount Marine Light - SS316 Housing



- 1.LED Chip Brand: Cree
- 2.Working Voltage(V): DC8-28V with outside driver
- 3.Working Current(mA): 1000
- 4.Emitting Angle of Peak(θ): 30
- 5.Unit: Piece
- 6.Package Size(cm): 24x21x9
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: Stainless Steel

Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Marine Light-6*3wRC3	18W	Red	630	400-430	1100	1490
IH-Marine Light-6*3wGC3	18W	Green	520	600-660		
IH-Marine Light-6*3wBC3	18W	Blue	460	120-140		
IH-Marine Light-6*3wYC3	18W	Yellow	590	400-430		
IH-Marine Light-6*3wWC3	18W	White	/	720-760		

12 * 3W Surface Mount Marine Light - SS316 Housing





- 1.LED Chip Brand: Cree
- 2.Working Voltage(V): DC8-28V with outside driver
- 3.Working Current(mA): 2000
- 4.Emitting Angle of Peak(θ): 30
- 5.Unit: Piece
- 6.Package Size(cm): 27x23x9
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: Stainless Steel



Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
----------	-----------	----------------	-----------------	-------------------	-------	-------

IH-Marine Light-12*3wR	12X3W	Red	620-630	800-860	1690	1950
IH-Marine Light-12*3wG	12X3W	Green	510-525	1200-1300		
IH-Marine Light-12*3wB	12X3W	Blue	455-470	240-280		
IH-Marine Light-12*3wY	12X3W	Yellow	580-590	800-860		
IH-Marine Light-12*3wW	12X3W	White	/	1400-1600		



12 * 3W RGB Surface Mount Marine Light - SS316 Housing

		<p>1.LED Chip Brand: Cree 2.Working Voltage(V): DC8-28V with outside driver 3.Working Current(mA): 210-770/260-970/260-970 4.Emitting Angle of Peak(θ): 30 5.Unit: Piece 6.Package Size(cm): 27x23x9 7.Product Description: -- 8.Waterproof Level: IP68 9.Case Material: Stainless Steel</p>				
						
Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
ZY-TDF02-12X3W RGB	12X3W	Red	620-630	800-860	1690	1950
	12X3W	Green	510-525	1200-1300		
	12X3W	Blue	455-470	240-280		

2 * 9W Trim Tab Light - SS316 Housing

		<p>1.LED Chip Brand: -- 2.Working Voltage(V): DC11-14(built-in IC) 3.Working Current(mA): 500/pcs 4.Emitting Angle of Peak(θ): 130 5.Unit: Piece 6.Package Size(cm): 27x23x9 7.Product Description: -- 8.Waterproof Level: IP68 9.Case Material: Stainless Steel</p>				
						
Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Trim Tab Light-2*9wB	18W	Blue	455-465	120	920	1200
IH-Trim Tab Light-2*9wW	18W	White	/	600		

1 * 9W Trim Tab Light - SS316 Housing

		<p>1.LED Chip Brand: -- 2.Working Voltage(V): DC11-14(built-in IC) 3.Working Current(mA): 500 4.Emitting Angle of Peak(θ): 130 5.Unit: Piece 6.Package Size(cm): 11.5x5x11 7.Product Description: -- 8.Waterproof Level: IP68 9.Case Material: Stainless Steel</p>				
						
Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Trim Tab Light-1*9wB	1X9W	Blue	455-470	50-80	117	150

IH-Trim Tab Light-1*9wW

1X9W

White


/

330-380

41 /

45U


6 * 3 Bulb Light -



- 1.LED Chip Brand: Cree
- 2.Working Voltage(V): DC8-28
- 3.Working Current(mA): 800
- 4.Emitting Angle of Peak(θ): 30
- 5.Unit: Piece
- 6.Package Size(cm): --
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: --

Part No.	Power (W)	Emitting Color	Wavelength(nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Bulb light-6*3wR	18W	Red	630	400-430	658.4	730
IH-Bulb light-6*3wG	18W	Green	520	600-660		
IH-Bulb light-6*3wB	18W	Blue	460	120-140		
IH-Bulb light-6*3wY	18W	Yellow	590	400-430		
IH-Bulb light-6*3wW	18W	White	/	720-760		


12 * 3 Bulb Light -



- 1.LED Chip Brand: Cree
- 2.Working Voltage(V): DC8-28
- 3.Working Current(mA): 2000
- 4.Emitting Angle of Peak(θ): 30
- 5.Unit: Piece
- 6.Package Size(cm): --
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: --

Part No.	Power (W)	Emitting Color	Wavelength(nm)	Luminous Flux(Lm)	NW(g)	GW(g)
IH-Bulb light-12*3wR	36W	Red	630	800-860	1308.6	1450
IH-Bulb light-12*3wG	36W	Green	520	1200-1300		
IH-Bulb light-12*3wB	36W	Blue	460	240-280		
IH-Bulb light-12*3wY	36W	Yellow	590	800-860		
IH-Bulb light-12*3wW	36W	White	/	1440-1520		

9W Drain Plug Light -



- 1.LED Chip Brand: 3*3W
- 2.Working Voltage(V): DC8-28(built-in IC)
- 3.GW(g): 167
- 4.Emitting Angle of Peak(θ): 120
- 5.Unit: Piece
- 6.Package Size(cm): 10.3x4x7.5
- 7.Product Description: --
- 8.Waterproof Level: IP68
- 9.Case Material: Bronze

Part No.	Power (W)	Emitting Color	Wavelength (nm)	Luminous Flux(Lm)	NW(g)	Working Current(mA)
IH-Drain Plug Light-1*9wB	9W	Blue	460	70	148	570
IH-Drain Plug Light-1*9wB-C	9W	Blue	460	50		300
IH-Drain Plug Light-1*9wW	9W	White	/	720		570
IH-Drain Plug Light-1*9wW-C	9W	White	/	450		300
IH-Drain Plug Light-1*9wR	9W	Red	630	300		500
IH-Drain Plug Light-1*9wR-C	9W	Red	630	180		260