



# SANLIN INDUSTRIAL GROUP(HK)LIMITED


(Yichuanxian SanlinTechnology Co.,Ltd)

Email:bentonite@foxmail.com web:www.estn.cn

Tel: +86-371-53783222 Fax: +86-379-60868956

## TECHNOLOGY DATE SHEET

### Granule Clay

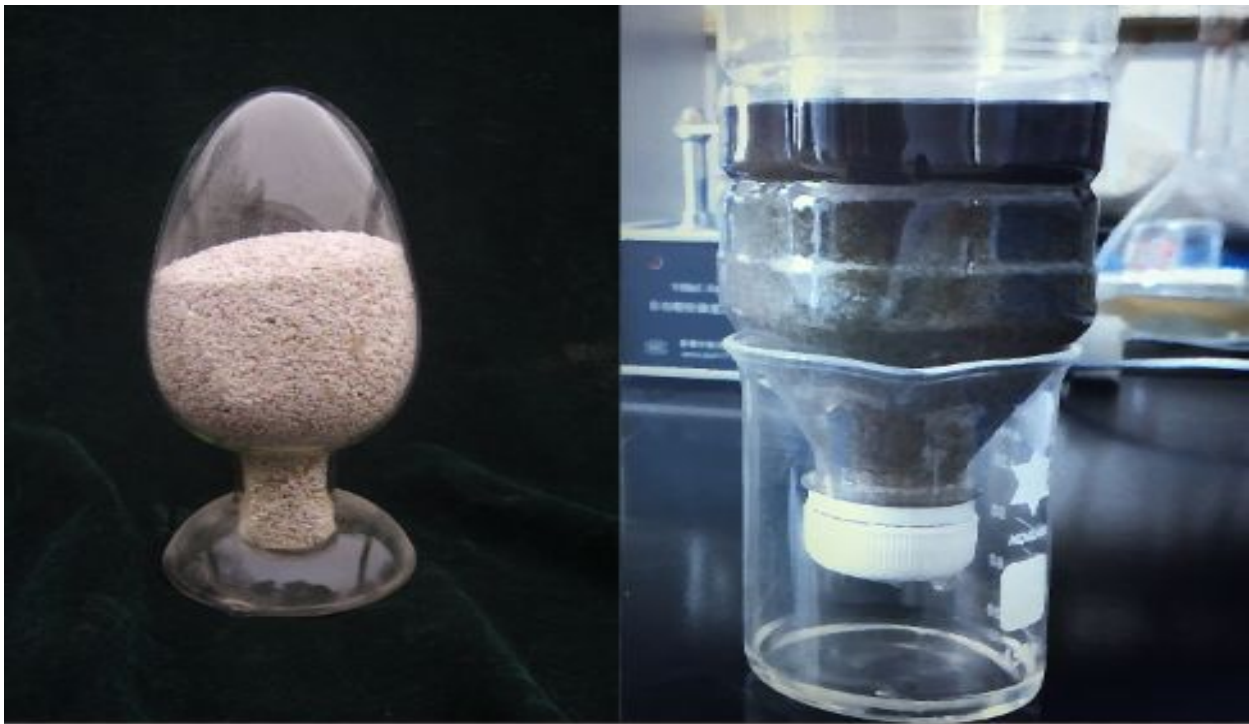

### Product advantage

- Super large specific surface area, strong adsorption ability
- Super hardness , insoluble water .

### Product useage

- ➔ Used in refining of aromatic hydrocarbon and the decolorization of lubricating oil.
- ➔ Used in refining paraffin wax and fat .
- ➔ Used as dehydrating agent, catalyst and Refining agent,drying agent.



# SANLIN INDUSTRIAL GROUP(HK)LIMITED

(Yichuanxian SanlinTechnology Co.,Ltd)

Email:bentonite@foxmail.com web:www.estn.cn

Tel: +86-371-53783222 Fax: +86-379-60868956

## Physical & Chemical Index

Item	Value	
Moisture	≤8%	
granule	>1.0mm	<5%
	0.25-1.0mm	<90%
	<0.25mm	<5%
Specidity surface area (m <sup>2</sup> /g)	≥300	
Free acid (H <sup>+</sup> )	≤0.16%	
Anti-crushes intensity (N/granule)	≥0.9	
Loose bulk Density (g/l)	0.6-0.9	