

# Connector

## I.D.C Socket Series



KLS1- 204EN Connectorsmicro-match2.54mm

### Electrical Characteristics:



Current Rating: 1 AMP  
Insulator Resistance: 1000M Ohm min. at DC 250V  
Contact Resistance: 20m Ohm max. at DC 100mA  
Operating Temperature: -45°C~+105°C

### Material:

Housing: PBT UL94V-0  
Contacts: Brass  
Plating: Selective gold plated: gold plated on mating area and Nickel plated on wire cutting area  
Gold plated: 3u" over 50u" nickel  
Cable: 1.27mm (0.050") pitch flat cable

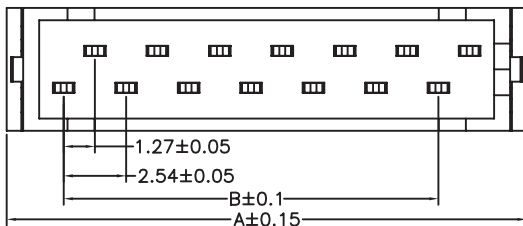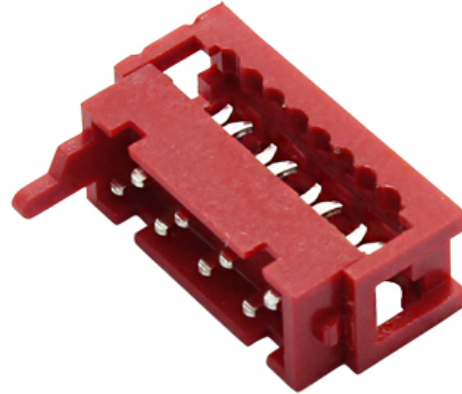

Part No.	Dimension	
	A	B
04	8.45	2.54
06	10.99	5.08
08	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

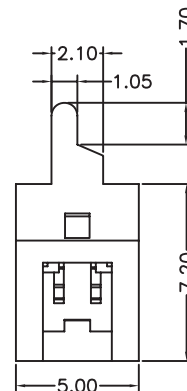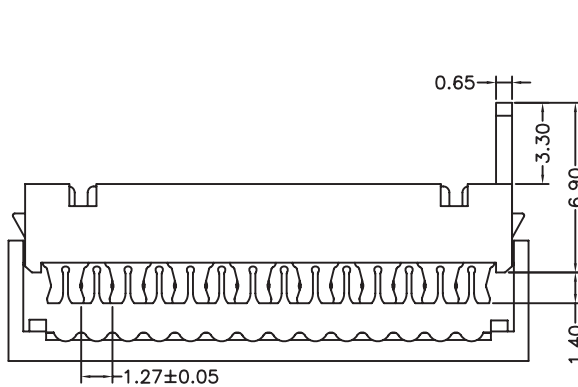

## ORDER INFORMATION

ProductNO.:KLS1-204EN-XX-R

Pos. NO. \_\_\_\_\_

Connectors micro-match 2.54mm Series \_\_\_\_\_

Insulator Color: R=Red

Number of Contacts: XX=06-26Pin