

Connector



I.D.C Socket Series



KLS1-204BE (I.D.C SOCKET 2.0mm With ear Series)

Electrical Characteristics:

- Current Rating: 1 AMP
- Withstanding Voltage: AC 500V for 1 Minute
- Insulator Resistance: 1000M Min. at DC 500V
- Contact Resistance: 15m Max.
- Operating Temperature: -40°C~+105°C

Material:

- Insulator: PBT+30% Glass Fiber (UL94V-0)
- Contacts: Copper Alloy with Gold or Tin over Nickel Plated.
- Cable: 1.00mm pitch fiat cable

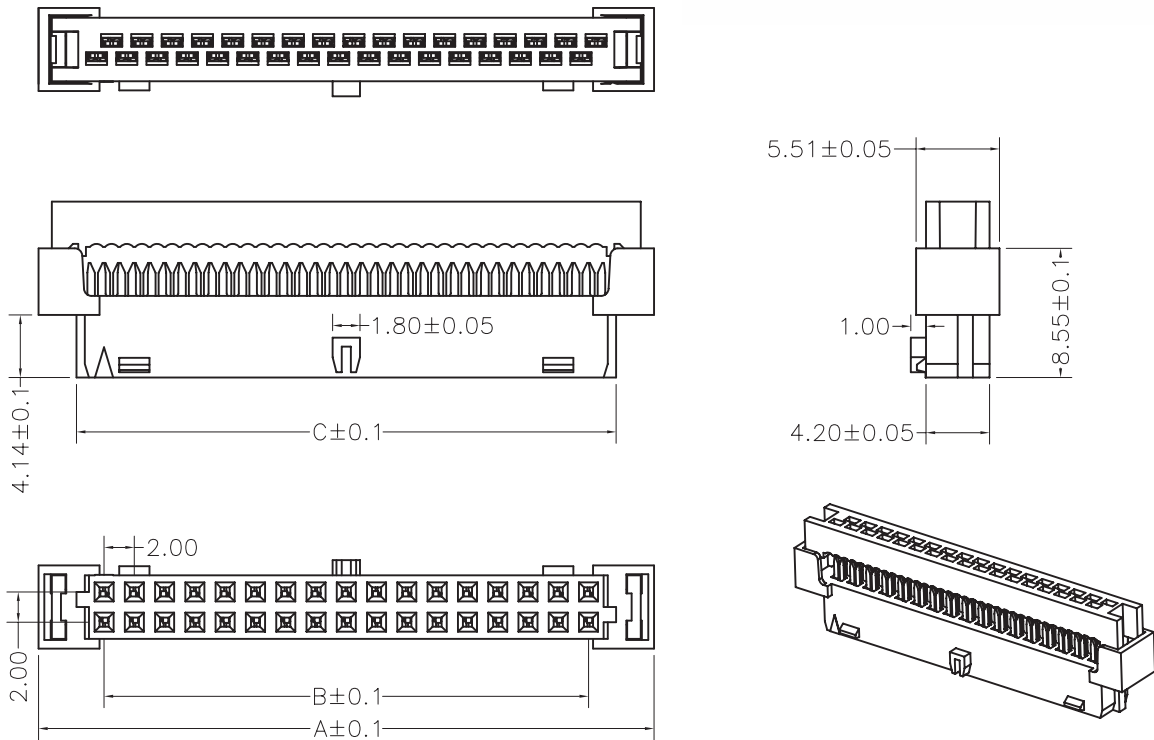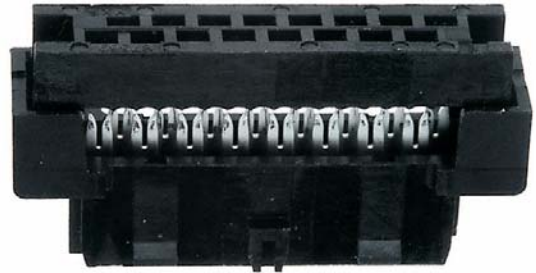

CKT. SIZE	10	12	14	16	20	22	26	34	40	44	50
A	16.65	18.65	20.65	22.65	26.65	28.65	32.65	40.65	46.65	50.65	56.65
B	8.00	10.00	12.00	14.00	18.00	20.00	24.00	32.00	38.00	42.00	48.00
C	11.65	13.65	15.65	17.65	21.65	23.65	27.65	35.65	41.65	45.65	51.65

ORDER INFORMATION

Product NO.: **KLS1-204BE-XX-B**

