

美国/加拿大聚氯乙烯电子线系列

UL/CUL PVC ELECTRONIC WIRE



UL/CUL 1569 HOOK-UP WIRE 连接线


产品说明

- 额定温度:80℃, 90℃, 105℃
- 额定电压:300V
- 引用标准:UL758, UL1581
- 导体使用30-10AWG单根或绞合裸铜或镀锡铜线
- 聚氯乙烯绝缘
- 符合ROHS环保标准
- 通过UL VW-1垂直耐燃测试
- 绝缘厚度均匀, 方便剥皮及裁剪

应用

- 用于一般电子、电器设备内部连线

结构CONSTRUCTION

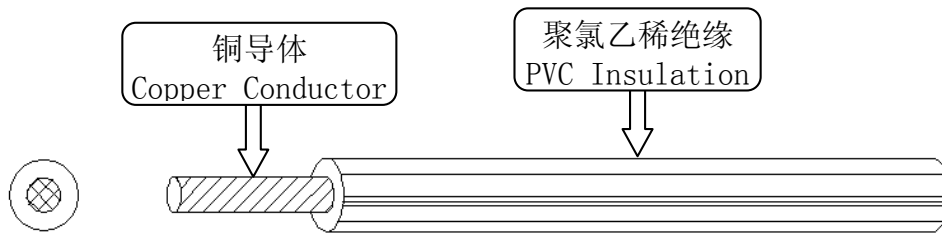

PRODUCT DESCRIPTION

- Rated temperature:80℃, 90℃, 105℃
- Rated voltage:300V
- Reference standard:UL758, UL1581
- Tinned or bare, stranded or Solid copper conductor, 30-10AWG
- Colour-coded PVC insulation
- Comply with ROHS environmental standard
- Passes UL VW-1 vertical flame test
- Uniform insulation thickness of wire to ensure easy stripping and cutting

APPLICATION

- For general purpose internal wiring of appliance

UL STYLE & C-UL	导体 Conductor			绝缘 Insulation		Maximum Resistance At 20℃ 最大导体电阻 Ω/Km	包装 Packing M/Coils 米/卷
	AWG 线规	NO. /mm 线数/线径	Diameter 直径 mm	Nominal thickness 厚度 mm	Nominal diameter 外径 mm		
UL1569	30	7/0.102	0.30	0.40	1.10	381	610
	28	7/0.127	0.38	0.41	1.20	239	610
	26	7/0.16	0.48	0.41	1.30	150	610
	24	11/0.16	0.61	0.40	1.40	94.2	610
	22	17/0.16	0.76	0.42	1.60	59.4	610
	20	26/0.16	0.94	0.43	1.80	36.7	610
	18	41/0.16	1.18	0.46	2.10	23.2	610
	16	26/0.254	1.49	0.46	2.40	14.6	305
	14	41/0.254	1.88	0.41	2.70	8.96	305
	12	65/0.254	2.36	0.42	3.20	5.64	305
	10	105/0.254	3.00	0.45	3.90	3.546	305