

Solid Tires For Forklift And Small Field Running Vehicles



R701



R706




R705



R701(with holes)

No.	Size of Tire	Rim Size	Outside Diameter	Section Width	Net Weight(Kg)	Max Load (Kg)						
						Counter Balance Lift Trucks						Other Industrial Vehicles
						10km/h		16km/h		25km/h		
						Driving	Steering	Driving	Steering	Driving	Steering	
1	400-8	3.00D/3.75	410.00	115.00	13.10	910	700	830	640	765	590	590
2	5.00-8	3.00D	466.00	127.00	18.70	1255	965	1145	880	1060	815	815
3	5.50-15	4.50E	666.00	144.00	37.60	2525	1870	2415	1790	2195	1625	1495
4	6.00-9	4.00E	533.22	140.00	27.60	1975	1520	1805	1390	1675	1290	1290
5	6.00-15	4.50E	694.00	148.00	42.20	2830	2095	2705	2000	2455	1820	1675
6	6.50-10	5.00F	582.47	157.30	37.60	2715	2090	2485	1910	2310	1775	1775
7	7.00-12	5.00S	663.14	163.27	48.50	3105	2390	2835	2180	2635	2025	2025
8	7.00-15	5.50S/6.00	737.67	177.60	62.00	3700	2845	3375	2595	3135	2410	2410
9	7.50-16	6.00	805.00	180.00	76.00	4400	3385	4025	3095	3730	2870	2870
10	8.25-15	6.50	829.04	202.00	93.00	5085	3910	4640	3570	4310	3315	3315
11	15x4 1/2-8	3.00D	383.00	106.60	9.70	1005	775	915	705	850	655	655
12	16*6-8	4.33R	416.00	156.00	17.30	1545	1190	1410	1085	1305	1005	1005
13	18x7-8	4.33R	452.00	154.80	21.30	2430	1870	2215	1705	2060	1585	1585
14	18x7-9	4.33R	452.00	154.80	20.20	2230	1780	2150	1615	2005	1505	1540
15	21*8-9	6.00E	523.00	180.00	35.10	2890	2225	2645	2035	2455	1890	1890
16	23x9-10	6.50F	594.68	211.66	52.20	3730	2870	3405	2620	3160	2430	2430
17	23*10-12	8.00G	592.00	230.00	52.40	4450	3425	4060	3125	3770	2900	2900
18	27*10-12	8.00G	680.00	236.00	76.50	4595	3535	4200	3230	3900	3000	3000
19	28*9-15	7.00	700.00	230.00	61.30	4060	3125	3710	2855	3445	2650	2650
20	28*12.5-15	9.75	706.00	300.00	87.60	6200	4770	5660	4355	5260	4045	4045
21	140/55-9	4.00E	380.00	130.00	10.00	1380	1060	1260	970	1170	900	900
22	200/50-10	6.50	457.56	198.04	25.70	2910	2240	2665	2050	2470	1900	1900
23	250-15	7.00/7.50	726.41	235.00	75.00	5595	4305	5110	3930	4745	3650	3650
24	300-15	8.00	827.02	256.00	116.00	6895	5305	6300	4845	5850	4500	4500
25	355/65-15	9.75	825.00	301.70	136.00	7800	5800	7080	5310	6000	4800	5450

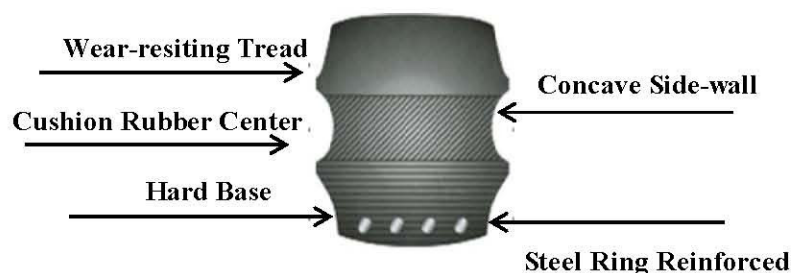

WRST® Series

This series is newly developed as our high-end product which can be used on different kinds of poor working environment.

- Extremely deep tread pattern and unique tread design are two factors which provide WRST® series higher wear resistance than other similar brands.
- Big tread pattern design increase tire contact, reduce ground pressure, lower rolling resistance, and strengthen wear resistance.



WonRay® Series

- This series chooses new tread pattern, strictly control production cost and truly achieve low price with high quality
- Three compound construction, a new design popular in Europe and America
- Wear resistant tread compound
- Super base compound

RONGYING® Series

- Resilient center compound
- Steel ring reinforced



Non-Marking Tire

High performance non-marking tires with light color or other colorful rubber compound are designed to operate where clean floors are a priority. No mark is left on the ground when it is running or braking, especially suitable for the application of enterprises where contamination is strictly prohibited, such as pharmacy, catering trade, textile, electron, aviation, etc. Any sizes of black resilient and press-on tires can be made into non-marking tire.



All series of tires can be designed to Halo (or clip, quick) from base in order to fit one-piece rim, which makes the installation of rim much easier and more convenient. Linde and Jungheinrich forklifts usually use this type of solid tyre.

R705 Clip Black



R701 Clip White Non Marking



R711



18.00-25 solid tires for big forklift such as reach stacker, masted loader container handlers, empty container handlers and cranes

We can produce solid forklift tire in different color and type as customer's special request.

R701 Green



R705 Grey



R701 Grey



R701 With Holes



Forklift Solid Tires With Rims-Lock Rims And Split Rims

