


# LED | T8 Tube Light

C - series For Commercial Lighting

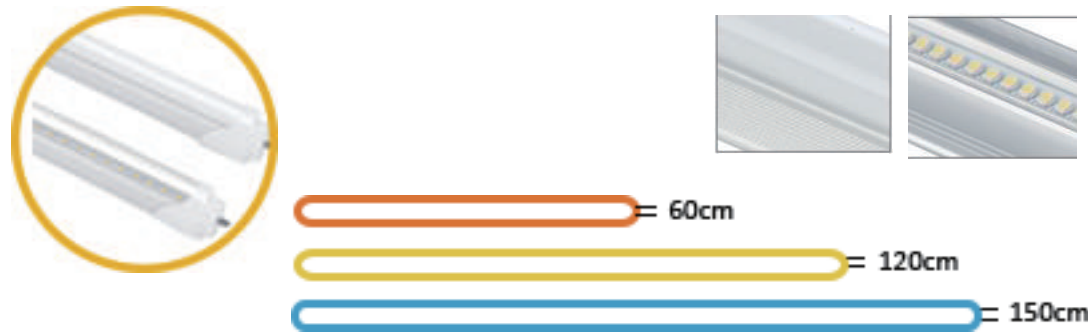

### Ratings and Certifications

- L70 >30,000 hours @ 25° Ambient
- CE ROHS CCC
- IP20
- 3yr full performance warranty



## Product specification

Model number	Product Size (cm)	Wattage (W)	Voltage (V)	Luminous flux (lm)	Efficacy (Lm/W)	CCT (K)	Cover	Material	Beam angle	Customization available
BC-TL060-A	60	9	110/220	810	90	4000	Milky/Clear	Aluminum	120	●
BC-TL120-A	120	18	110/220	1620	90	4000	Milky/Clear	Aluminum	120	●
BC-TL150-A	150	24	110/220	2160	90	4000	Milky/Clear	Aluminum	120	●
BC-TL060-G	60	9	110/220	900	100	4000	Milky	Glass	270	●
BC-TL120-G	120	18	110/220	1800	100	4000	Milky	Glass	270	●
BC-TL150-G	150	22	110/220	2200	100	4000	Milky	Glass	270	●
BC-TL060-P	60	9	110/220	900	100	4000	Milky	Plastic	300	●
BC-TL120-P	120	18	110/220	1800	100	4000	Milky	Plastic	300	●
BC-TL150-P	150	22	110/220	2200	100	4000	Milky	Plastic	300	●

### More options:



CRI 85/92

Ballast compatible