




WANLI-YANGDONG SERIES

DIESEL GENERATING SETS

万力-扬动系列柴油发电机组

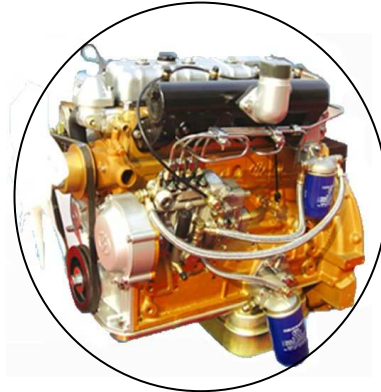

Genset Model /Unit	Y9	Y10	Y12	Y16	Y20	Y30	
Standby Rating kw/ kva	9.5 /12.1	11 /13.8	13.2 /16.5	17.6/22	22 /27.5	33 /41	
Prime Rating kw /kva	9 /11	10 /12.5	12 /15	16 /20	20 /25	30 /37.5	
Model	YSAD380	Y385	YD480	YD485	YSD490	Y4100	
Diesel Engine	12h Rated Power /kw	10	11	13.2	15	21	27
	Speed / rpm	1500					
	Fuel Consumption/g/kw.h	247	247	250.2	250.2	235	23.5
	Closed water cooled/Electirc starting						
	Leroy somer or STAMFORD or Marathon TFW,STC(by your option)						
Alternator	Rated Output/kw	8.6	8.6	10	12	16	20
	Rated Current/ A	15.5	15.5	18.1	21.6	28.9	36.1
	Rated Voltage/ V	400/230					
	Frequency/Hz	50					
	Power Factor	COSφ 0.8Lagging					
	Phase/ Connection	3-phase,4-wire,Y type connection					
	Excitation	brushless					
Net Weight / kg	525	550	600	700	750	800	
Overall Dimensions / mm	1200*600*1100	1200*600*1100	1300*650*1200	1300*650*1200	1400*700*1250	1500*730*1250	

Specification given herein are subject to change without notice

闽东万力电机有限公司

MINDONG WANLI ELECTRICAL MACHINE CO.,LTD

TEL: 86-5936338976 FAX:86-593-6330988

Website:www.wanlimotor.com EMAIL: wanlimotor@163.com

ADD:NO.13 DAXI VILLAGE INDUSTRIAL ZONE.FUANCITY,FUJIAN,CHINA.