


WEIGHING*SENSING*MEASUREMENT

TW65023



Applications:

- Floor scales, Tank weighing, Bin and Hopper weighing, etc.
 - Interchangeable with Revere 5123, 9123, Sensortronics 65023
- Stainless Steel available: TW65023SS

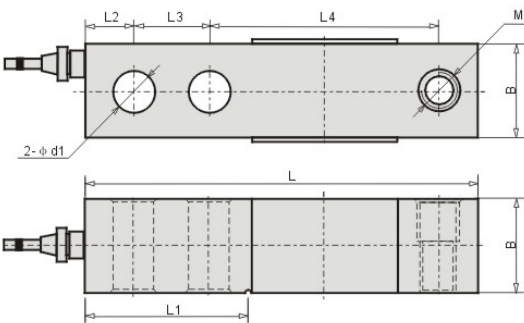

Capacity	L	L1	L2	L3	L4	d	B	M
1.5~4(klb) 0.5~2(t)	130	56.5	15.8	25.4	76.2	13.5	31.8	M12x1.75
5~15(klb) 2.5~5(t)	171.5	77.2	19.1	38.1	95.3	20	38.1	M18x1.5
20(klb) 10(t)	222.3	101.6	25.4	50.8	120.7	26.2	50.8	M24x2

PRODUCT PARAMETER

CAPACITY: 500kg-10t

Rated output	3.0mV/V±10%	Zero balance	±1% F.S
Accuracy Class	C3, 0.02%	Input resistance	350±5Ω
Non-linearity	0.02%F.S	Output resistance	350±3Ω
Hysteretic	0.02%F.S	Safe overload	150% F.S
Non-repeatability	0.02%F.S	Ultimate overload	300% F.S
Creep in 30 minutes	0.02%F.S	Excitation voltage	9VDC-12DC
Temperature effect span	0.02%F.S/10℃	Recommend platform size	400mm*600mm
Temperature effect zero	0.03%F.S/10℃	Insulation resistance	≥5000MΩ(50V DC)
Compensated temperature range	-10℃~40℃	Environmental protection	IP66
Operating temperature range	-40℃~65℃	Material	Alloy Steel, Stainless Steel
Cable wires			
•Red] +input [•Green] +output [•Black] -input [•White] -output			

ALL THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE
SENORTECHNICS CO., LTD WWW.SENORTECHNICS.COM
TEL: +86-574-66267500 FAX: +86-574-62805266