

Linkbasic information technology create an excellence in the future
Fashion and selection
Introduction of our products:



CAT 5E UTP KEYSTONE JACKS

KEYSTONE JACKS JKG06-UC5E




Products Description

The new style Jack provides Category 5E system performance and user-friendly installation features. The compact size provides high-density connectivity in the work area and telecommunications room.

Features and benefits

- Available in Cat5e, T568A/B wiring, meet or exceed TIA/EIA Cat5E requirements
- Housing : high temperature thermoplastic
- Compact jack design, 8 positions and 8 conductors
- Contact : phosphor bronze , phosphor bronze with 6 to 50 μ " gold plate
- Accept 22-26 AWG solid with a insulation diameter of 0.4-0.6 mm
- Easy to be terminated, low attenuation loss and high return loss
- High reliability and superior performance
- Available in different colors

Presentation

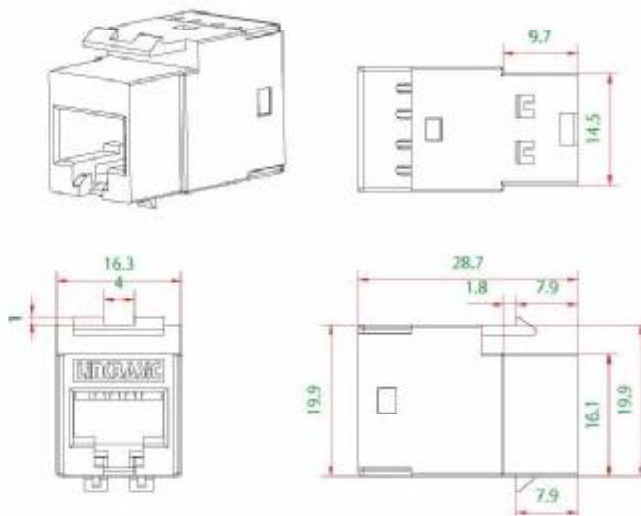

Photo



Back



Top



Side



Front



Bottom



Back View W/Dust Caps



Dust Caps

Order Information

Part number	Description	Inner box	Carton	Carton measurement	Carton weight
JKG06-UC5E	Cat 5E UTP Keystone Jack	25PCS	250PCS	L 53.6cm × W 31.3cm × H 23.4cm	4KG

CAT 5E UTP KEYSTONE JACKS

KEYSTONE JACKS JKG06-UC5E




Installation instructions



1 Strip back cable jacket using Linkbasic tool (P/N: TLD01) or equivalent.



2 View the color on the module to determine proper location of the conductors based upon preferred wiring scheme.

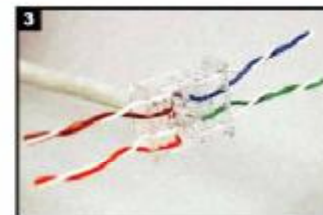

3 Insert each wire into the appropriate channel according to the color code on the module.



4 Press the Termination Cap into the jack tightly using Linkbasic tool (P/N: TLA02).



5 Trim any excess wires as shown using electrician's scissors or equivalent.



6 Keystone Jack assemblies.