




Anping County Resen Screen Co., Ltd.


Stainless steel conveyor belt specification

1. Type (C)

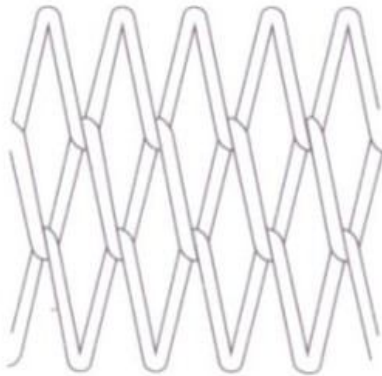


Belt Type	Belt wire Dia. (mm)	Spiral Circle (Nos/m)	Belt wire Nos. (Nos/m)	Belt thickness (mm)	Edge type
C2.8	2.8	84	63	10±0.5	Welded
C2.8	2.2	100	76	8±0.4	
C1.6	1.6	69	80	7±0.4	
C1.2	1.2	100	150	6.5±0.4	
C1.1	1.1	182	175	6±0.4	
C0.9	0.9	153	158	6±0.4	

2. Type (Rs)

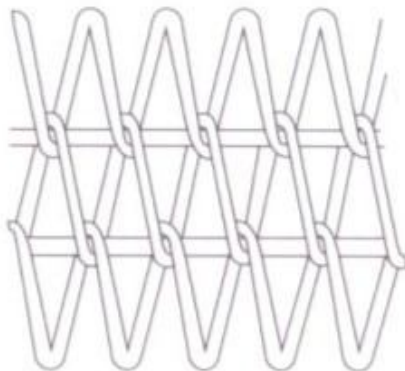

Belt Type	Belt wire Dia. (mm)	String Wire Dia. (mm)	Spiral Circle (Nos/m)	Belt wire Nos. (Nos/m)	Belt thickness (mm)	Edge type
Rs3.5/4	3.5	4	25	29	14±0.6	Welded
Rs3.5/3.5	3.5	3.5	50	46	14±0.6	
Rs2.8/2.8	2.8	2.8	50	46	11±0.5	
Rs2.0/2.0	2.0	2.0	100	114	9±0.4	
Rs1.6/1.6	1.6	1.6	100	80	7±0.4	
Rs0.9/0.9	0.9	0.9	200	200	6±0.4	

3. Type (DRs)

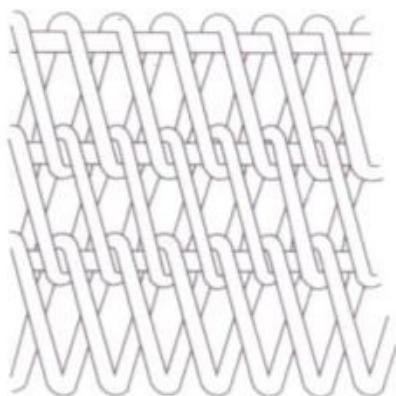


Belt Type	Belt wire Dia. (mm)	String Wire Dia. (mm)	Spiral Circle (Nos/m)	Belt wire Nos. (Nos/m)	Belt thickness (mm)	Edge type
DRs3.5/3.5	3.5	3.5	100	46	14±0.6	Welded or softforming edge
DRs2.8/3.5	2.8	3.5	132	71	12±0.5	
DRs2.8/2.8	2.8	2.8	118	60	11±0.5	
DRs2.0/2.0	2.0	2.0	200	125	9±0.4	
DRs1.6/1.6	1.6	1.6	250	200	7.5±0.4	

Add: YinWang Road, Industry Base, South of AnPing County, HeBei Province Post Code: 053600




Anping County Resen Screen Co., Ltd.

4. Type (Bw)

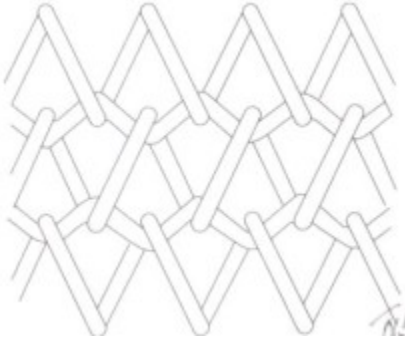


Belt Type	Belt wire Dia. (mm)	String Wire Dia. (mm)	Spiral Circle (Nos/m)	Belt wire Nos. (Nos/m)	Belt thickness (mm)	Edge type
Bw3.5/3.5	3.5	3.5	80	72	12.5±0.5	Welded or softforming edge
Bw3.0/3.0	3.0	3.0	71	57	11±0.5	
Bw2.8/3.0	2.8	3.0	60	52	11±0.5	
Bw2.0/2.5	2.0	2.5	118	62	9±0.4	
Bw1.6/2.0	1.6	2.0	200	158	7.5±0.4	
Bw1.2/1.6	1.2	1.6	227	94	6±0.4	
Bw1.2/1.2	1.2	1.2	167	91	6±0.4	

5. Type (Bs)

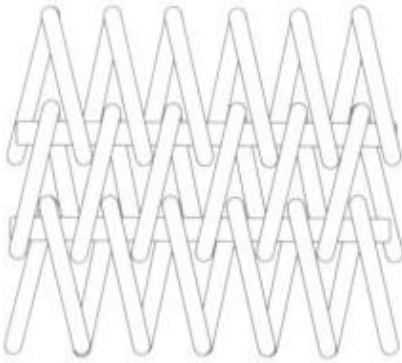

Belt Type	Belt wire Dia. (mm)	String Wire Dia. (mm)	Spiral Circle (Nos/m)	Belt wire Nos. (Nos/m)	Belt thickness (mm)	Edge type
Bs3.5/4.0	3.5	4	118	50	14±0.5	Welded Or softforming edge
Bs3.5/3.5	3.5	3.5	118	49	14±0.5	
Bs2.5/3.0	2.5	3	132	69	10±0.5	
Bs2.2/2.8	2.2	2.8	154	75	9±0.4	
Bs2.0/3.0	2	3	227	69	10±0.5	
Bs1.6/2.2	1.6	2.2	132	66	7.5±0.4	
Bs1.2/1.6	1.2	1.6	200	170	6±0.4	

6. Type (DBs)

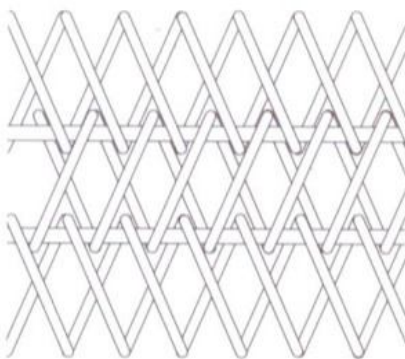

Belt Type	Belt wire Dia. (mm)	String Wire Dia. (mm)	Spiral Circle (Nos/m)	Belt wire Nos. (Nos/m)	Belt thickness (mm)	Edge type
DBs2.8/3.5	2.8	3.5	100	50	12±0.5	Welded Or softforming edge
DBs2.8/2.8	2.8	2.8	118	50	11±0.5	
DBs2.6/3.2	2.6	3.2	139	54	12±0.5	
DBs1.8/2.8	1.8	2.8	157	80	9±0.4	
DBs1.5/1.8	1.5	1.8	143	95	7.5±0.4	
DBs1.1/2.0	1.1	2.0	426	108	6.5±0.4	

Add: YinWang Road, Industry Base, South of AnPing County, HeBei Province Post Code: 053600



Anping County Resen Screen Co., Ltd.

7. Type (nCBs)



Belt Type	Belt wire Dia. (mm)	String Wire Dia. (mm)	Spiral Circle (Nos/m)	Belt wire Nos. (Nos/m)	Belt thickness (mm)	Edge type
nCBs1. 8/2. 2	1. 8	2. 2	123	203	8. 5±0. 4	Link chain
nCBs1. 6/2. 2	1. 6	2. 2	132	197	7. 5±0. 4	
nCBs1. 6/2. 2	1. 6	2. 2	133	200	7. 5±0. 4	
nCBs1. 2/1. 6	1. 2	1. 6	167	306	7. 0±0. 4	

8. N-shaped



9. Special Type



Summer Ma
Sales Manager

Anping County Resen Screen Co.ltd.
Mobile: 86 (0)15130841130
Fax: 86 [318 7756677](tel:3187756677)
[MSN:mengjuanma@hotmail.com](mailto:mengjuanma@hotmail.com)
Skype:mengjuan-ma

Add: YinWang Road, Industry Base, South of AnPing County, HeBei Province Post Code:053600