

| Details of Optional accessories |   |  |
|---------------------------------|---|--|
| Model No.                       | Specification   | Product Picture  |
| MS01                            | <p>Microwave sensor(10GHZ/24GHZ)</p> <p>Power: AC/DC 12~36V</p> <p>Radio frequency:10.525GHZ/24.125GHZ</p> <p>Protection level: IP54</p> <p>Size:131×61×46mm(L×W×H)</p> <p>Max installation height: 4M</p> <p>Detection range and sensibility can be adjusted.</p>  |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>  |
| MS02                            | <p>Microwave sensor(10GHZ/24GHZ)</p> <p>Power: AC/DC 12~36V</p> <p>Radio frequency: 10.525GHZ/24.125GHZ</p> <p>Protection level: IP54</p> <p>Size:110×64×42mm(L×W×H)</p> <p>Max installation height: 4M</p> <p>Detection range and sensibility can be adjusted.</p> |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p> |

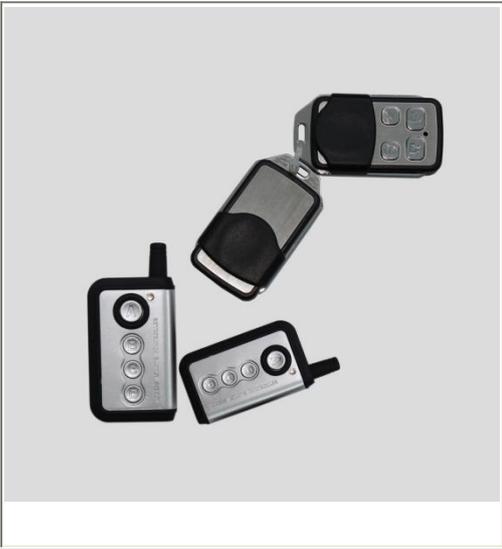
|                       |   |   |
|-----------------------|---|---|
| <p>MS03/M<br/>S04</p> | <p>Microwave Sensor(24GHZ)</p> <p>Power: AC/DC 12~36V</p> <p>Radio frequency: 24.125GHZ</p> <p>Protection level: IP54</p> <p>Size:121×80×51mm(L×W×H)</p> <p>Max installation height: 4M</p> <p>Chip brand: German Innosent</p> <p>Detection range and sensibility can be adjusted.</p>  |   |
| <p>IS01</p>           | <p>Infrared sensor</p> <p>Power: AC/DC 12~36V</p> <p>Sensing distance: 0.2m-2m</p> <p>Protection level: IP54</p> <p>Size:221×74×35mm(L×W×H)</p> <p>Max installation height: 3M</p> <p>Detection range and sensibility can be adjusted.</p> <p>The product can be used in the occasion where the building environment is narrow and close to street and the accuracy detection ability is demanded .Detection sensing distance adjustable, with high anti-interference , easy operation and reliable</p> |  |

|             |  |  |
|-------------|--|--|
| <p>IS02</p> | <p>Combined microwave&amp;infrared sensor</p> <p>Power:AC/DC 12~36V</p> <p>Transmitting frequency:24.125GHZ</p> <p>Protection level:IP54</p> <p>Size:262×55×44mm(L×W×H)</p> <p>Max installation height: 3M</p> <p>Combined radar activation and Infrared safety sensor is used for automatic sliding door, folding door and curve door. Radar technology is for door activation. Infrared technology is for door safety entrance. Unique anti-clip function design, no need extra safety beam sensors.</p> <p>Have function of background self-learn. Can learn background automatically when power on. Suit all kinds of occasions.Always self-correcting once be influenced by quake, distortion, move, dark and sunshine. Ensure the sensor can work durable.</p> <p>Microwave technology adopts the Germany Microwave sensor module, not influenced by temperature and humidity with reliable working performance.</p> |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TÜV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p> |
|-------------|--|--|

|             |   |   |
|-------------|---|---|
| <p>PT01</p> | <p>Safety beam(photocell)</p> <p>Power:AC/DC12~36V<br/> Max transmission distance: 10m<br/> Type: single beam(one pair eyes)/<br/> double beam(2 pairs eyes)</p> <p>Receiver dimension: 123*50*32mm</p> <p>Electric eyes: 19(length)*13(diameter)<br/> mm</p>   |  <p>3 Year Warranty CE TÜV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>   |
| <p>PT02</p> | <p>Safety beam(photocell)</p> <p>Power:AC/DC12~30V<br/> Max transmission distance: 10m<br/> Type: single beam(one pair eyes)/<br/> double beam(2 pairs eyes)</p> <p>Receiver dimension :<br/> 105.5*53.4*28.5mm</p> <p>Electric eyes: 19(length)*13(diameter)<br/> mm</p>   |    |
| <p>FS01</p> | <p>Foot sensor switch</p> <p>Power:AC/DC12~36V<br/> Recommended installation height: 0.3M<br/> from the ground</p> <p>Active infrared ray of<br/> modulation-demodulation controlled by<br/> microcomputer. Widely used in the<br/> operating room of hospital and<br/> laboratory to prevent hand pollution.</p> |  <p>3 Year Warranty CE TÜV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p> |

|             |   |  |
|-------------|---|--|
| <p>FC01</p> | <p>Five-range programmed function switch</p> <p>Power: 12~36V</p> <p>Function status: full open, half open, exit only, lock, automatic</p> <p>Size:113×63×20mm(L×W×H)</p> <p>function switch against passwords, safe and reliable. With memory function in case of power failure. Password can be reset..</p> |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>   |
| <p>FC02</p> | <p>Five-range function keypad</p> <p>Power: 12~36V</p> <p>Functions: full open, half open, exit only, lock, automatic</p> <p>Size:86×86×10mm(L×W×H)</p>   |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>  |
| <p>KP01</p> | <p>Function key switch(five-range)</p> <p>Power: AC/DC 18~36V</p> <p>Functions: full open, half open, exit only, lock, automatic</p> <p>Size:86×86×10mm(L×W×H)</p>  |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p> |

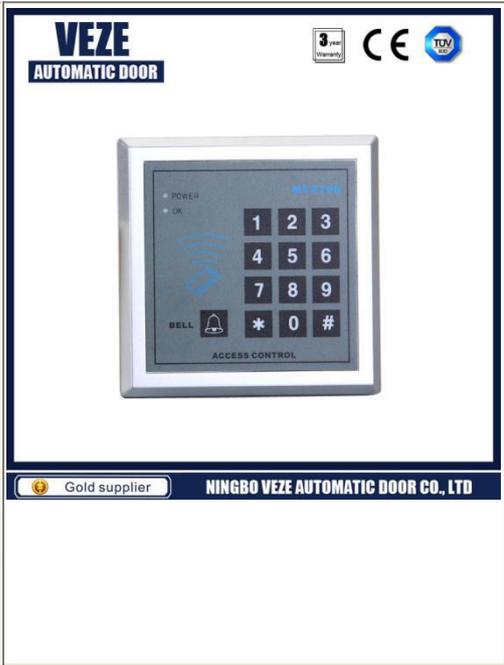
|             |   |  |
|-------------|---|--|
| <p>KP02</p> | <p>LED key switch(five-range)<br/>Power: AC/DC18~36V</p> <p>Size:92×92×46mm(L×W×H)</p> <p>Functions: full open, half open, exit only, lock, automatic</p> <p>This product is unidirectional command switch for automatic door accessory using. With special design with bottom panel, it is convenient for different installation occasions.</p>                  |    |
| <p>KP03</p> | <p>Five-range LCD key switch</p> <p>Power: AC/DC12~36V</p> <p>Size:92×92×33mm(L×W×H)</p> <p>Functions: full open, half open, exit only, lock, automatic</p> <p>This product is unidirectional command switch for automatic door. With TFT true color liquid display, special design with bottom panel, it is convenient for different installation occasions.</p> |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>  |
| <p>PB07</p> | <p>Infrared hand sensor switch</p> <p>Power: AC/DC12~36V</p> <p>Size:92×92×33mm(L×W×H)</p> <p>Transmit distance: 1-20cm, can be set according to actual occasion.</p>   |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p> |

|             |   |  |
|-------------|---|--|
| <p>FC04</p> | <p>Learning code remote control device(4 channels)</p> <p>Power: 24VDC<br/>433MHZ Learning code type<br/>Transmission distance: 25M<br/>Function status: full open, half open,lock, automatic</p>   |    |
|             |   |   |
| <p>FP01</p> | <p>Fingerprint access control device / time attendance machine</p> <p>Power supply: 12VDC<br/>Fingerprint capacity: 1000<br/>Recorded capacity: 100,000<br/>Dimension: 180*82*53(L×W×H)<br/>Identification mode: Fingerprint / ID card / Password<br/>Voice prompt: available</p> |  |

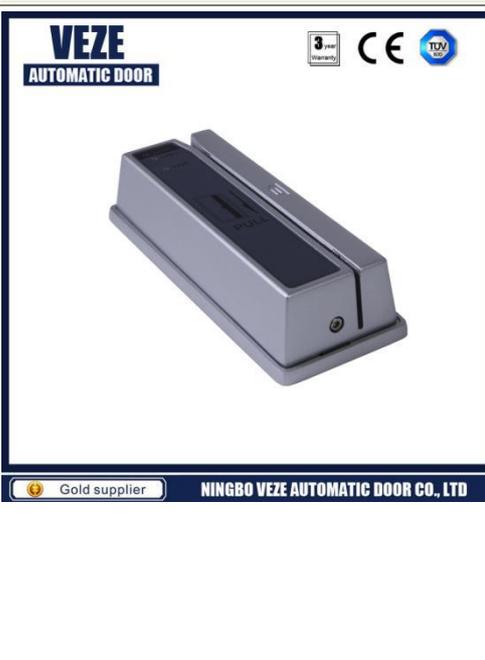
|             |  |  |
|-------------|--|--|
| <p>PB04</p> | <p>No touch hand sensor switch<br/> Power: DC 12V<br/> Working type: infrared induction<br/> Working distance: 1-15cm, can be set according to actual occasion.<br/> Weight: 83g<br/> Size: 89×89×37mm(L×W×H)</p>  |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>   |
| <p>PB05</p> | <p>Infrared touchless hand sensor switch<br/> Power: AC/DC12~36V<br/> Working type: infrared induction<br/> Transmit distance: 1-15cm, can be set according to actual occasion.<br/> Size: 113×63×20mm(L×W×H)<br/> Weight: 110g</p>  |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>  |
| <p>PB06</p> | <p>Wireless push button switch<br/> Power: AC/DC12~36V<br/> Hold open time: 1-9S adjustable<br/> Pushing panel: 203 (L) *41 (W) *12.5 (H) mm<br/> Receiver: 123 (L) *50 (W) *32 (H) mm<br/> Widely be used for auto door and door control equipment. With the wireless signal output, door can be open by the pushing the panel. Easy installation, specially designed for the occasions</p> |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p> |

|      |  |  |
|------|--|--|
|      | which have difficulty in wire embedding.   |  |
| AK03 | <p>Access keypad</p> <p>Power: 12VDC<br/>Storage capacity: 1000 users</p> <p>Open method : Card, password, card+password.</p> <p>Dimension: 115×75×21 (mm)</p> |  <p>The image shows a black, rectangular access keypad with a numeric keypad (0-9, #) and a card reader slot. It features the 'VEZE AUTOMATIC DOOR' logo and certification marks (3-year warranty, CE, TÜV) at the top. At the bottom, it is labeled as a 'Gold supplier' from 'NINGBO VEZE AUTOMATIC DOOR CO., LTD'.</p>      |
| AK04 | <p>Access keypad</p> <p>Power: 12VDC<br/>Storage capacity: 1000 users</p> <p>Open method : Card, password, card+password.</p> <p>Dimension: 110×75×25 (mm)</p> |  <p>The image shows a silver, rectangular access keypad with a numeric keypad (1-9, 0, #) and a card reader slot. It features the 'VEZE AUTOMATIC DOOR' logo and certification marks (3-year warranty, CE, TÜV) at the top. At the bottom, it is labeled as a 'Gold supplier' from 'NINGBO VEZE AUTOMATIC DOOR CO., LTD'.</p> |
| FP02 | <p>Finger printer(stainless)</p> <p>Power: DC 12V</p> <p>Memory capacity:120<br/>Weight: 500g<br/>Size: 115×70×35mm(L×W×H)</p>                                 |  <p>The image shows a silver, rectangular finger printer with a fingerprint sensor and a card reader slot. It features the 'VEZE AUTOMATIC DOOR' logo and certification marks (3-year warranty, CE, TÜV) at the top. At the bottom, it is labeled as a 'Gold supplier' from 'NINGBO VEZE AUTOMATIC DOOR CO., LTD'.</p>       |

|             |   |  |
|-------------|---|--|
| <p>PB03</p> | <p>Wired push button switch(plastic)<br/> Weight: 96g<br/> Size: 200×50×12.5mm(L×W×H)</p>                   |    |
| <p>PB02</p> | <p>Wired push button switch(stainless)<br/> with blue LED<br/> Weight: 65g<br/> Size: 86×86×35mm(L×W×H)</p> |   |
|             | <p>Wired push button switch(stainless)<br/> with blue LED<br/> Weight:30g<br/> Size: 91×28×20mm(L×W×H)</p>  |  |

|                |   |  |
|----------------|---|--|
| <p>PB02</p>    | <p>Wired Plastic switch<br/> Weight:50g<br/> Size: 86×86mm(L×W)</p>   |    |
| <p>AK02</p>    | <p>Access keypad(plastic)<br/> Power: 12VDC<br/> User capacity: 500 users</p> <p>Open method: Card, password, both.</p> <p>1000 pcs card info can be stored</p> <p>Dimension: 117×117×21 (mm)</p> <p>Specific designed for office, housing, security system and building's access . It not only can work by reading card or password ,but also can control electric lock and auto-door.</p> |   |
| <p>NEW UPS</p> | <p>Automatic door backup lithium battery</p> <p>Input voltage: 220VAC, 50HZ</p> <p>Output voltage : DC12V/5.2A, DC24V/2.6A</p> <p>Size: 243×59×45mm(L×W×H)</p> <p>When power off, it can make the door work 7 hours or open and close 500 times.</p>  |  |

|             |   |  |
|-------------|---|--|
| <p>LC01</p> | <p>Metal manual lock<br/>Lock manually, open with key.</p>  |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>   |
| <p>LC02</p> | <p>Electric lock<br/>Power: DC 12V<br/>Working current: 110mA<br/>Installation hole:212(L)*35(W)<br/>Deep into wall around<br/>43mm<br/><br/>Panel<br/>dimension:205×34×42mm(L×W×H)</p>                 |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>  |
| <p>LC03</p> | <p>Electromagnetic lock<br/>Power: DC 12V<br/>Working current: 180mA<br/><br/>With the function of locking the access device, it uses with access control, and equip with bracket for installation.</p> |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p> |

|             |  |  |
|-------------|--|--|
| <p>LC04</p> | <p>Electromagnetic lock<br/> Power: DC 12V<br/> Working current: 960mA</p> <p>Load weight:180kgs</p> <p>The product uses with access control device , it can be installed on glass doors ,wooden doors, iron gate or fireproof doors.</p>  |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>   |
| <p>DS01</p> | <p>Auto door disable switch</p> <p>Power:AC/DC12~36V</p> <p>Panel size: 160 (L) *120 (W) *15 (H) mm</p> <p>Stainless steel panel design,easy operation with key to choose different functions including: Emergency opening, Automatic and Full lock. Suitable for automatic door of disable-person washroom or washroom management of building.</p>                              |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p>  |
| <p>MCR</p>  | <p>Magnetic card reader</p> <p>Input voltage:DC12V</p> <p>Storage capacity: 5600 cards</p> <p>Dimension: 138*56*32mm (L*W*H)</p> <p>The product can be widely used as exit switch for bank VIP room.With the authorized card controlled by Magnetic card reader access controller, only some people have the right to enter..Online working or offline working is available.</p> |  <p>VEZE<br/>AUTOMATIC DOOR</p> <p>3 Year Warranty CE TUV</p> <p>Gold supplier NINGBO VEZE AUTOMATIC DOOR CO., LTD</p> |

|      |  |  |
|------|--|--|
|      |  |  |
| GC01 | <p>Glass clamp(20cm)</p> <p>Connect glass door panel and hanger</p> <p>2pcs for 1 door leaf</p>                        |    |
| GC02 | <p>Glass clamp(1m)</p> <p>Connect glass and hangers for frameless glass door</p> <p>One pc for one glass door leaf</p> |   |
| FG01 | <p>Framed door guider(rubber or brush type optional)</p> <p>10-40mm</p>  |  |

|             |  |   |
|-------------|--|---|
| <p>FG02</p> | <p>Framed door guider(rubber or brush type optional)<br/>30-60mm</p> |   |
| <p>FG03</p> | <p>Frameless glass door guider<br/>Max. 15mm</p>                     |  |
|             |  |   |
|             |  |   |